
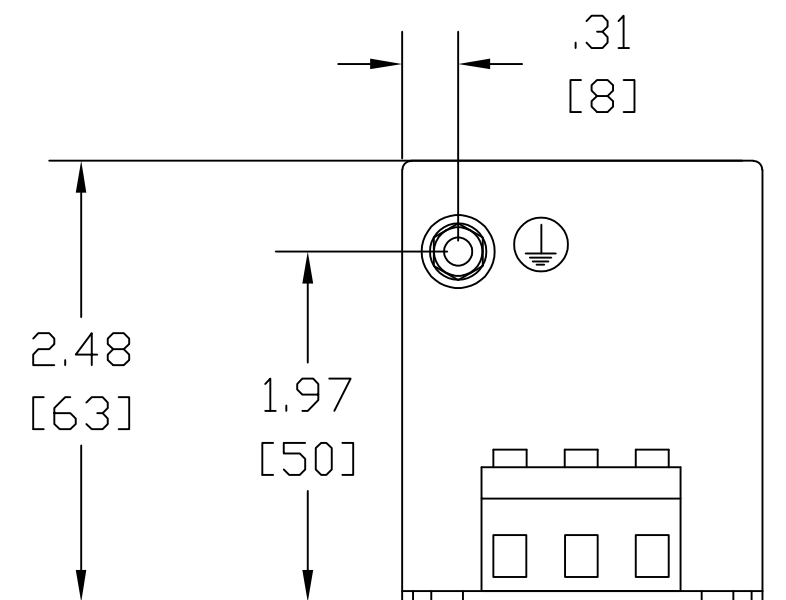
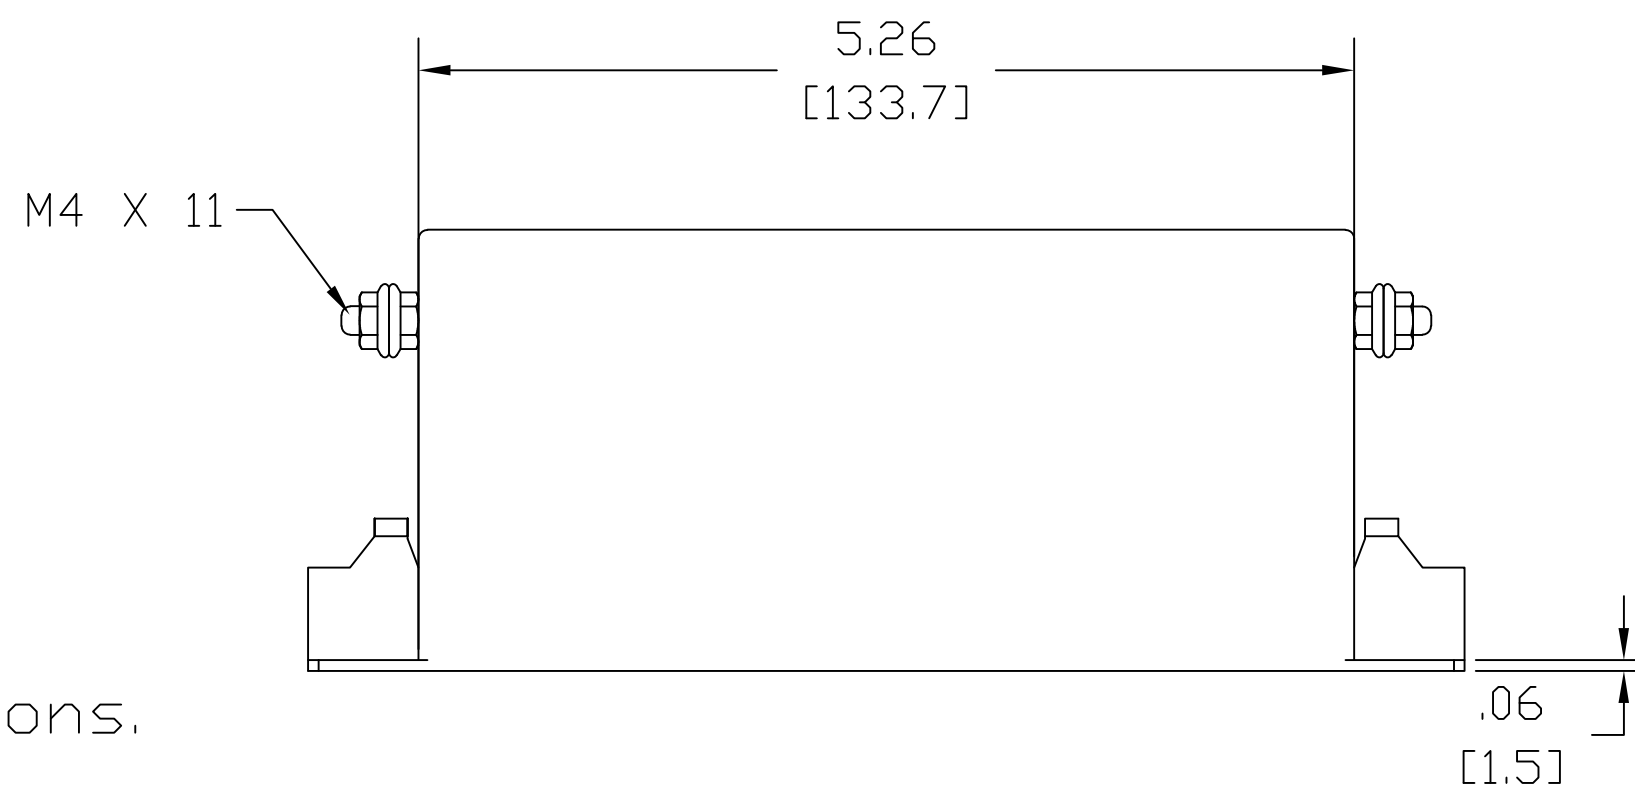


TERMINAL BLOCKS 4mm²
TIGHTENING TORQUE 0.5...0.6Nm

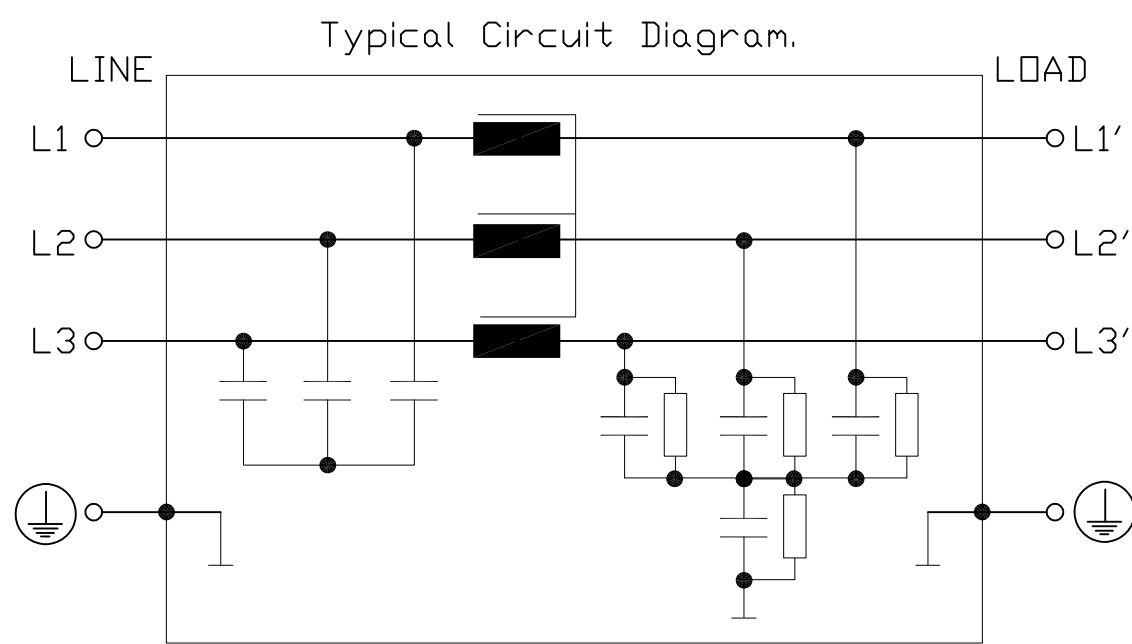

Technical data and measuring conditions.

Rated Voltage V_R	520/300 V AC, 50/60Hz.
Rated Current I_R	Referred to 40 °C ambient temperature
Test Voltage V_{test}	2236 V DC, 2 s (line/line) 2720 V DC, 2 s (line/case)
Overload Capability (thermal)	1.5 · I_R for 3 min per hour or 2.5 · I_R for 30 s per hour
Leakage Current I_{leak}	At 520 V AC, 50 Hz.
Climatic Category (IEC 60068-1)	25/100/21 (-25 °C/+100 °C/21 days damp heat test)
Approval Standards	EN 133200, UL 1283, CSA C22.2 No. 8
Approvals Markings	UR, cUR

V_R	I_R	Terminal cross section mm ²	I_{leak} mA	$R_{typ.}$ m ohm	Approx. Weight kg. / lbs.
AC V	A				
520/300	8	4	13	16	.58 / 1.3

			TOLERANCES (EXCEPT AS NOTED)		W132 N10611 Grant Drive Germantown, WI 53022 KRF FILTER KRF0008ATB, 200-480V, 8A
			DECIMAL		
			.XX ± .02 .XXX ± .01		
			FRACTIONAL ± 1/32		
ECO 3959 ADDED	4/12/17	JRN	ANGULAR ± 1/2°		DRN BY DSW DATE 1/04/2010 DVG. NO. KRF0008ATB
APPROVAL MARKINGS			SCALE TO FIT		APRVD. SHT.1 OF1
NO	REVISION	DATE	BY		