
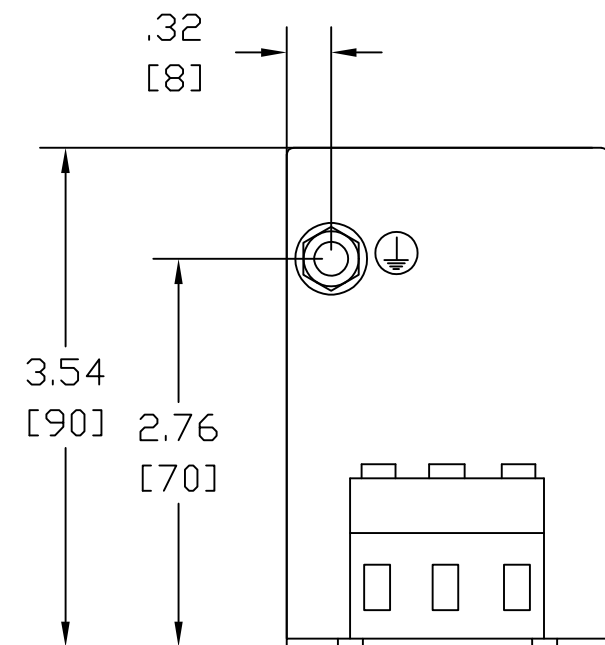
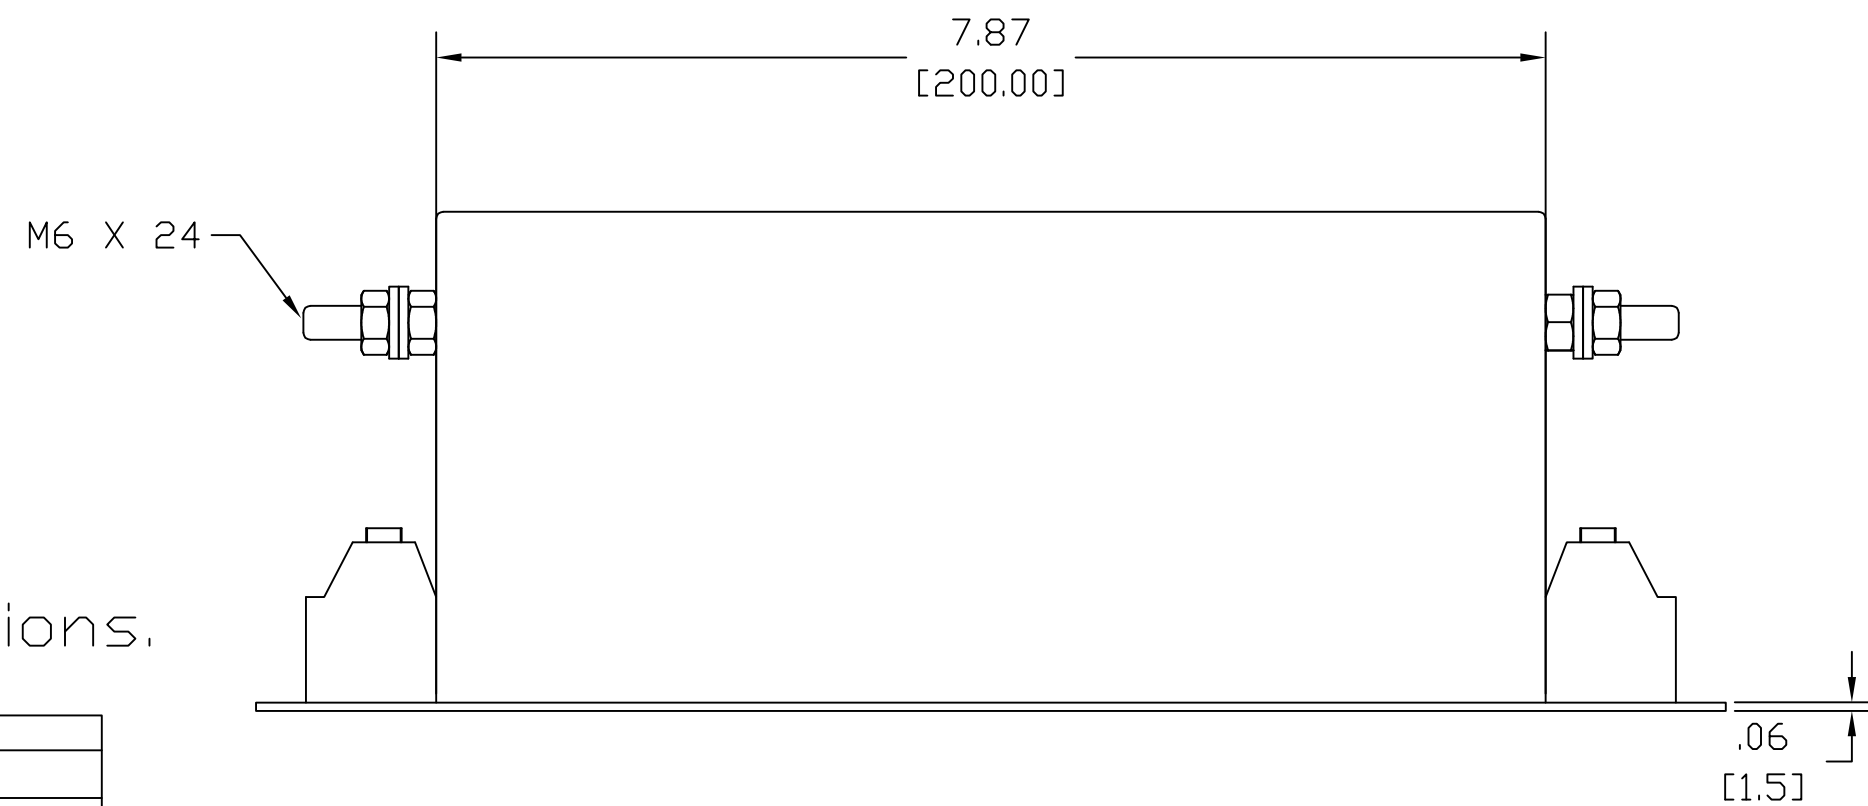


TERMINAL BLOCKS 10mm<sup>2</sup>  
TIGHTENING TORQUE 1.2...1.5 Nm

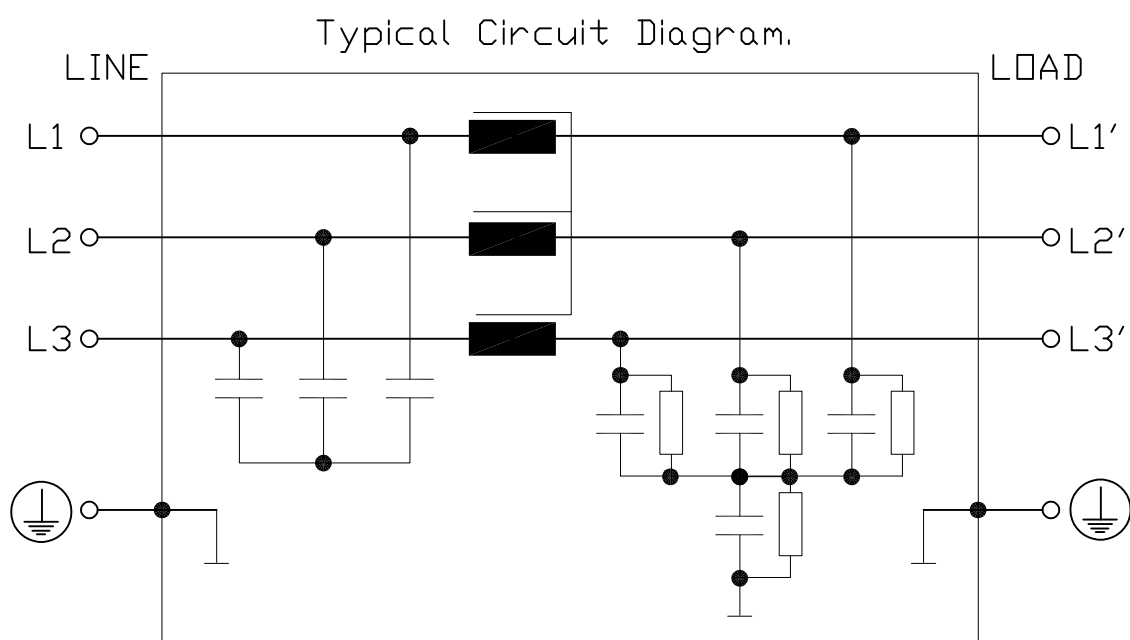

Technical data and measuring conditions.

Rated Voltage $V_R$	520/300 V AC, 50/60Hz.
Rated Current $I_R$	Referred to 40 °C ambient temperature
Test Voltage $V_{test}$	2236 V DC, 2 s (line/line) 2720 V DC, 2 s (line/case)
Overload Capability (thermal)	1.5 · $I_R$ for 3 min per hour or 2.5 · $I_R$ for 30 s per hour
Leakage Current $I_{leak}$	At 520 V AC, 50 Hz.
Climatic Category (IEC 60068-1)	25/100/21 (-25 °C/+100 °C/21 days damp heat test)
Approval Standards	EN 133200, UL 1283, CSA C22.2 No. 8
Approval Markings	UR, cUR

$V_R$ AC V	$I_R$ A	Terminal cross section mm <sup>2</sup>	$I_{leak}$ mA	$R_{typ.}$ m ohm	Approx. Weight kg. / lbs.
520/300	36	10	15	4	1.75 / 3.90

			TOLERANCES (EXCEPT AS NOTED)	<b>TCL</b> ® W132 N10611 Grant Drive Germentown, WI 53022
			DECIMAL .XX ± .02 .XXX ± .01	
ECO 3959 ADDED	4/12/17	JRN	FRACTIONAL ± 1/32	KRF FILTER KRF0036ATB, 200-480V, 36A
APPROVAL MARKINGS			ANGULAR ± 1/2°	DRN BY DSW DATE 1/04/2010 DWG. NO. KRF0036ATB
NO REVISION	DATE	BY		SCALE TO FIT APRVD. SHT.1 OF1