


Typical Circuit Diagram.

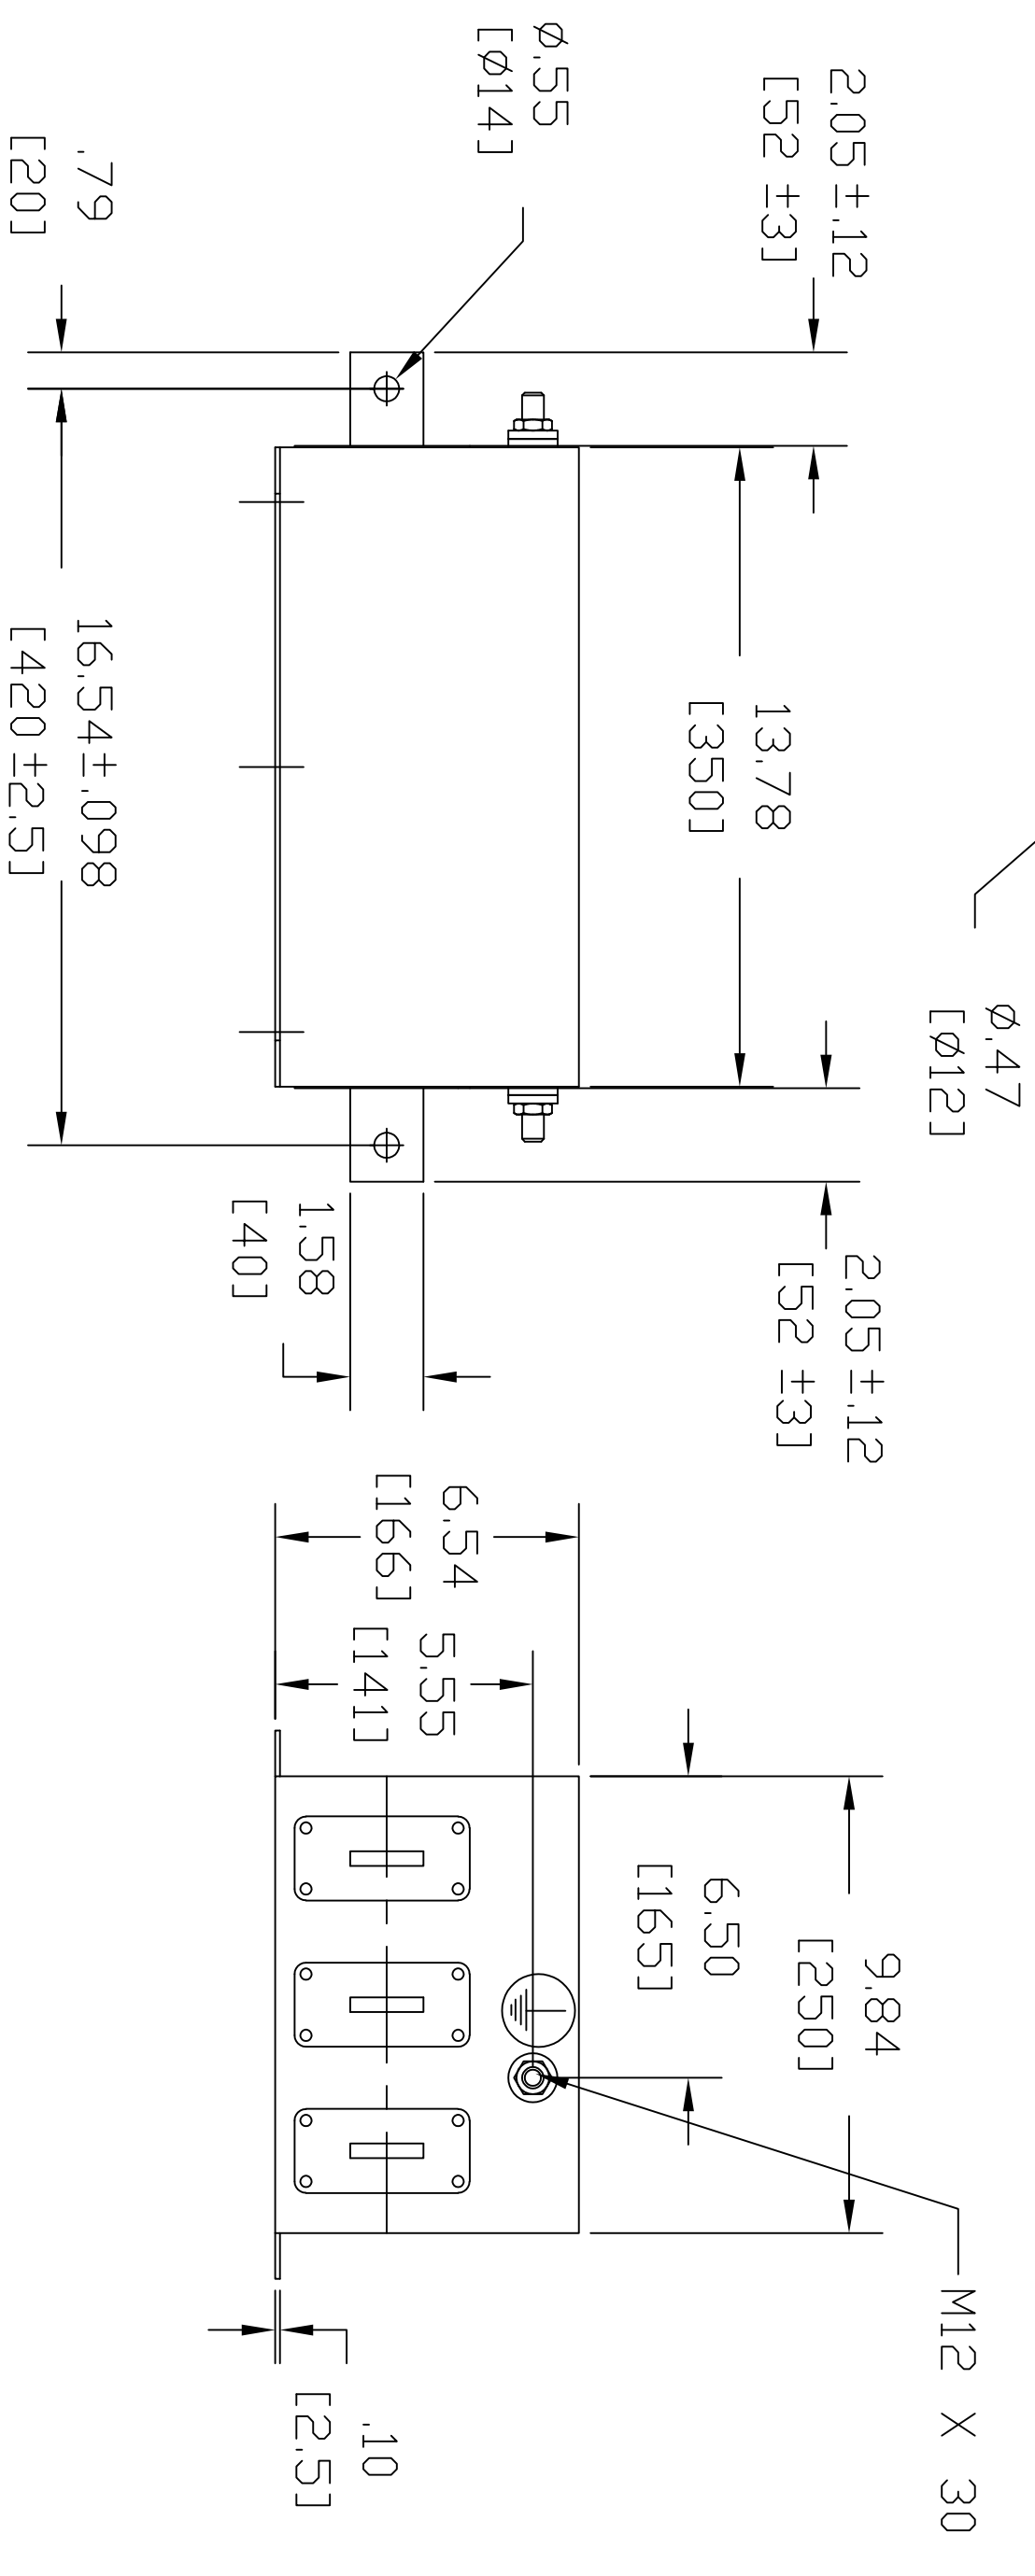

Technical data and measuring conditions.

Rated Voltage V_R	530/310 V AC, 50/60Hz.		
Rated Current I_R	Referred to 40 °C ambient temperature		
Test Voltage V_{test}	2280 V DC, 2 s (line/line) 2690 V DC, 2 s (line/case)		
Overload Capability (thermal)	1.5 · I_R for 3 min per hour or 2.5 · I_R for 30 s per hour		
Leakage Current I_{leak}	At 530 V AC, 50 Hz.		
Climatic Category (IEC 60068-1)	25/100/21 (-25 °C/+100 °C/21 days damp heat test)		
Approval Standards	EN 133200, UL 1283, CSA C22.2 No. 8		
Approval Markings	UR, CUR		

V_R	I_R	I_{leak}	$R_{typ.}$	Approx. Weight
AC	A	mA	μ ohm	kg. / lbs.
V		< 20	33	28 / 61.6
530/310	1000			

		TOLERANCES	
		DECIMAL	
		.XX ± .02	
		.XXX ± .01	
		FRACTIONAL	
		± 1/32	
		ANGULAR	
		± 1/2°	
ECD 3959 ADDED		DATE	BY
APPROVAL MARKINGS		4/12/17	JRN
REVISION			
ND			
KRF FILTER		DRN. BY DSV	
KRF1000ACB, 200-480V, 1000A		DATE 1/06/2010	
SCALE 10 FIT		APPRVD. CKRF1000ACB	
		DWG. NO. KRF1000ACB	
		SHT. 1 OF 1	

TOI® W132 NI0611 Grant Drive
Germanstown, WI 53022