
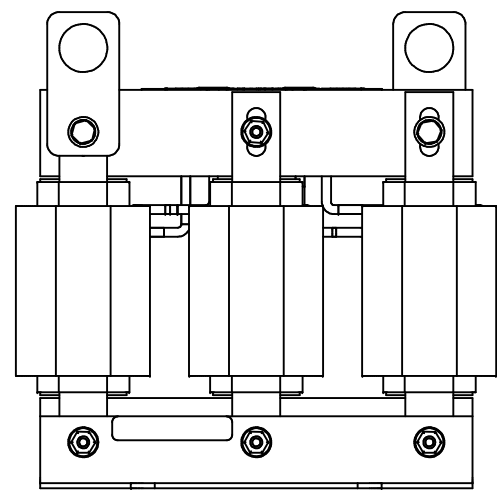


**Wire Range:**  
1AWG (7 & 19 strand only), 2 AWG to 22AWG

**Tightening Torque:**  
1AWG thru 4AWG 35 in.-lb. max  
6AWG thru 14AWG 30 in.-lb. max  
16AWG thru 22AWG 25 in.-lb. max

Markings On Coil For Reference Only.

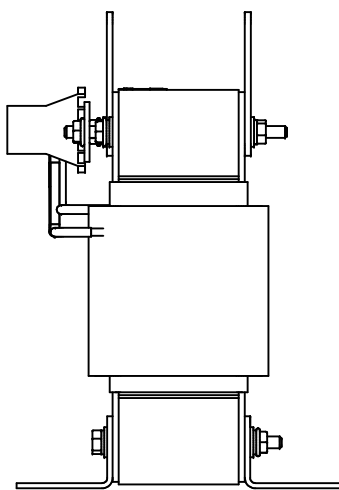


Reactor Part Number	Rated Amps (A)	Max Amps (A)	$\mu$ H +8%/-2%	Weight (LBS)
KTR10A65HL	25.3	110	2623	50

System Voltage 480V, 289Hz.

Customer Is Responsible For Installation  
To Meet All National And Local Electrical Codes.

Material(s) Shall be RoHS Compliant

DIMENSIONS IN INCHES (EXCEPT AS NOTED) TOLERANCES (EXCEPT AS NOTED) DECIMAL .XX ± .25 .XXX ± .10 FRACTIONAL ± 1/32 ANGULAR ± 1°		THE INFORMATION AND DESIGNS CONTAINED IN THIS DRAWING ARE CONFIDENTIAL AND THE PROPRIETARY PROPERTY OF ALLIENT INC. AND ITS SUBSIDIARIES. NEITHER THIS DESIGN NOR ANY INFORMATION CONTAINED IN THIS DRAWING MAY BE REPRODUCED OR DISCLOSED TO OTHERS WITHOUT THE EXPRESS WRITTEN CONSENT OF ALLIENT INC. AND ITS SUBSIDIARIES.				DSW DATE 11/23/15				W132N10611 Grant Drive Germantown, WI 53022 © 2025 Allient Inc.	
I	7082	Gap, 0.125 to 0.120	6/9/25	DSW	KTR10A65HL Tuning Inductor, 60HP, 25.3A, 480V						
F	5998	Added Lift rings	8/17/22	JSG	Tuning Inductor, 60HP, 25.3A, 480V						
NO	ECO	REVISION	DATE	BY	1/2	106190	SIZE C	SHT. 1 OF 1			