






TCI Part Number	Horsepower (HP)	Rated Amps (A)	---uH +8%/-2%	Weight (LBS)
KTR10A65XHL	75	25.3	2580	55

System Voltage 480v, 289Hz.

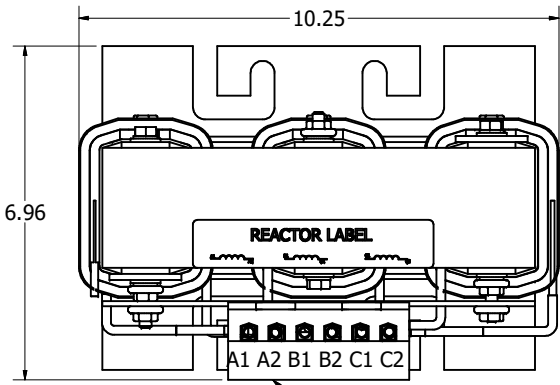


Markings On Coil And Terminal Block For Reference Only.

Wire Range:
1AWG (7 & 19 strand only), 2 AWG to 22AWG
Tightening Torque:
1AWG thru 4AWG 35 in.-lb. max
6AWG thru 14AWG 30 in.-lb. max
16AWG thru 22AWG 25 in.-lb. max

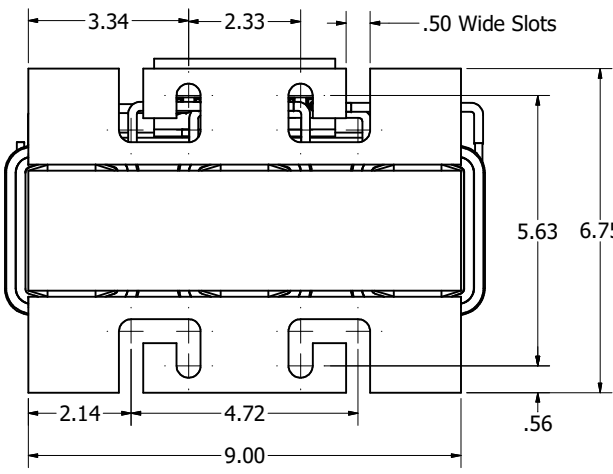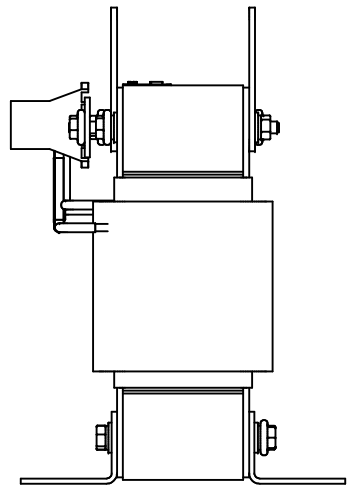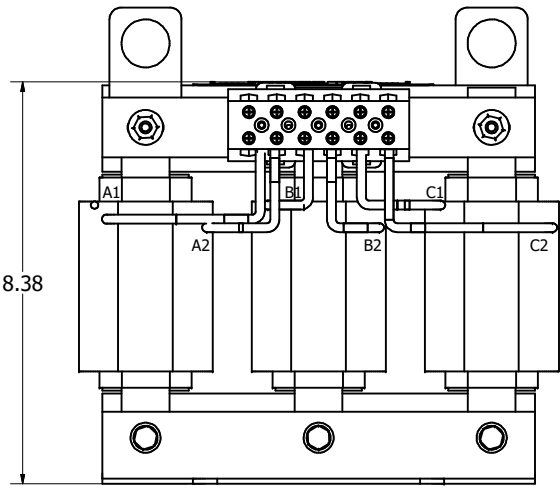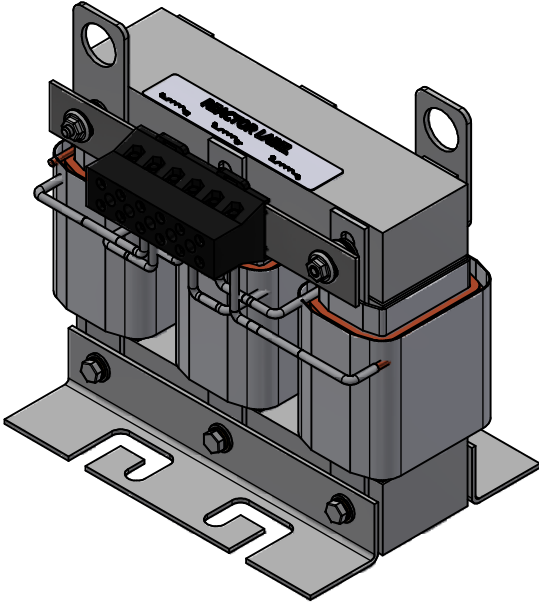

Customer Is Responsible For Installation to Meet All National And Local Electrical Codes.

Material(s) Shall be RoHS Compliant

THE INFORMATION AND DESIGNS CONTAINED IN THIS DRAWING ARE CONFIDENTIAL AND THE PROPRIETARY PROPERTY OF ALLIED MOTION TECHNOLOGIES INC. AND ITS SUBSIDIARIES. NEITHER THIS DESIGN NOR ANY INFORMATION CONTAINED IN THIS DRAWING MAY BE REPRODUCED OR DISCLOSED TO OTHERS WITHOUT THE EXPRESS WRITTEN CONSENT OF ALLIED MOTION TECHNOLOGIES INC. AND ITS SUBSIDIARIES.				TOLERANCES (EXCEPT AS NOTED)		 W132N10611 (Revised 12/2022) Germantown, NJ 08022 © 2022 TCI, LLC
				DECIMAL		
				.XX ± .03 .XXX ± .010		
				FRACTIONAL		
C	5998, Added lift rings	08/17/22	JSG	± 1/32		An Allied Motion Company Tuning Inductor, 75HP, 25.3 Amps, 480V, (High Inductance) DWN BY: DSW DATE: 10/26/15 SCALE: DRAWN: 107524DG REVISION DATE BY
B	5271 Design updated	5/19/2020	DSW	ANGULAR		
A	As Designed	1/13/18	DSW	± 1°		
NO	REVISION	DATE	BY			