



(Customer Connections)
Markings On Terminal Block
And Coils
For Reference Only.

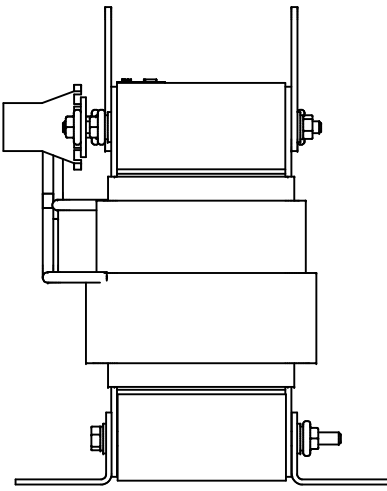

TCI Part#	Amps (A)	$\mu H \pm 8\% / -2\%$	Approx Weight (LBS)
KTR30C65HGP	41	1441	65

600 Volts, 60Hz.

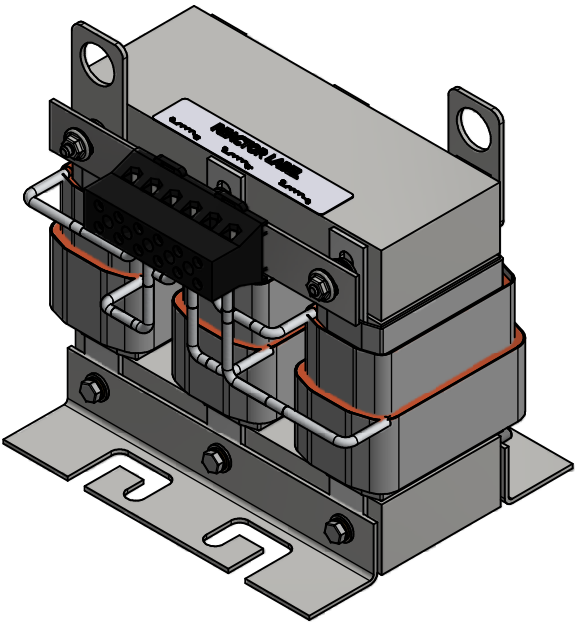

Wire Range: 1- 4 AWG. Torque : 35 IN-LBS (3.95 Nm)
6- 14 AWG. Torque : 30 IN-LBS (3.39 Nm)
16- 20 AWG. Torque : 25 IN-LBS (2.28 Nm)
22 AWG. Torque : 20 IN-LBS (2.26 Nm)

Customer Is Responsible For Installation to
Meet All National And Local Electrical Codes.

THE INFORMATION AND DESIGNS CONTAINED
IN THIS DRAWING ARE CONFIDENTIAL AND THE
PROPRIETARY PROPERTY OF ALLIED MOTION
TECHNOLOGIES INC. AND ITS SUBSIDIARIES.
NEITHER THIS DESIGN NOR ANY INFORMATION
CONTAINED IN THIS DRAWING MAY BE
REPRODUCED OR DISCLOSED TO OTHERS
WITHOUT THE EXPRESS WRITTEN CONSENT OF
ALLIED MOTION TECHNOLOGIES INC. AND ITS
SUBSIDIARIES.

NO	REVISION	DATE	BY	AS DESIGNED	4/13/2022	DSW
----	----------	------	----	-------------	-----------	-----

TOLERANCES
(EXCEPT AS NOTED)

DECIMAL
.XX $\pm .25$
.XXX $\pm .10$

FRACTIONAL
 $\pm 1/16$

ANGULAR
 $\pm 1^\circ$

Material(s) Shall be RoHS Compliant

TCI W132N10611 (Rev 13 Feb 2022)
Germanstown, WI 53022
© 2022 TCI, LLC

TCI
An Allied Motion Company

KTR30C65HGP
600V, 41A, 3 Phase, 5th Tuning Inductor

OWN BY: DSW DATE: 4/13/2022 109146DG
SCALE: 1/2.5 DRAWN BY: C

SHT 1 OF 1