

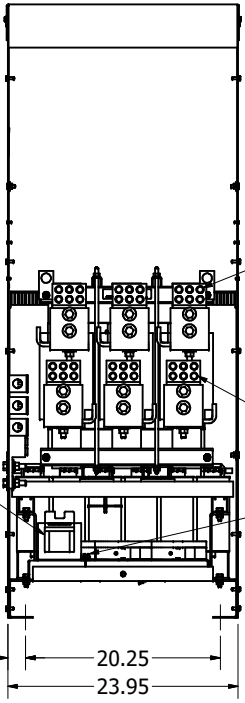
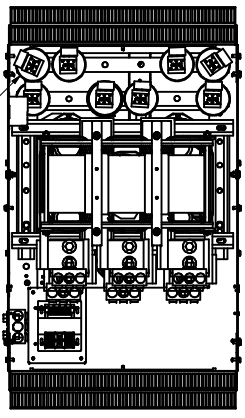


CAPACITORS

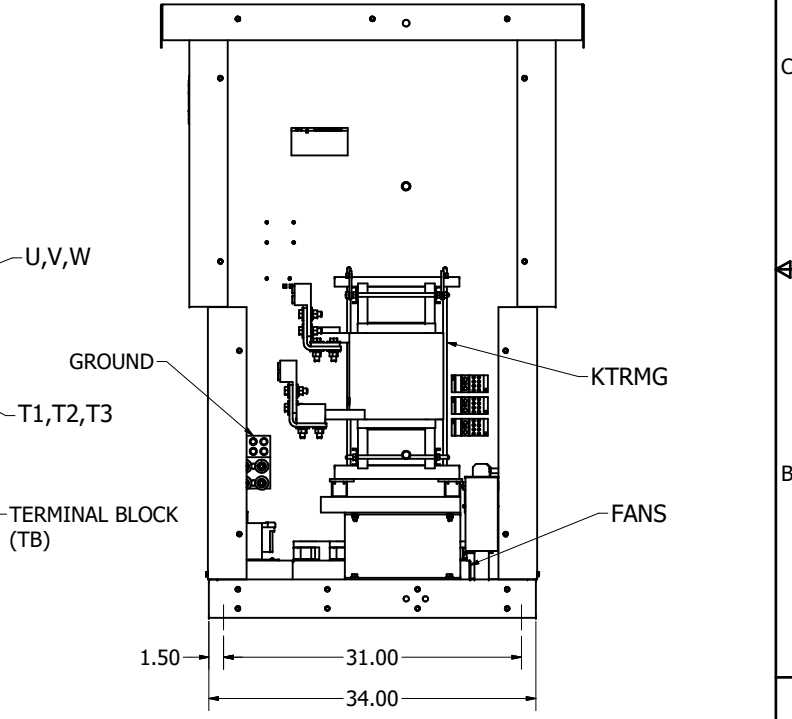

TRANSFORMER (XFMR), FU4, FU5

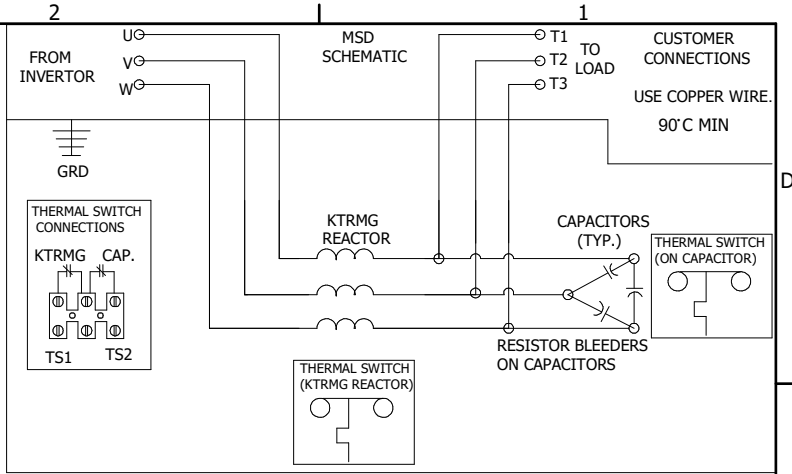

MSD PART NUMBER	HP	VOLTAGE	CURRENT	APPROX. WEIGHT	PRESSURE TERMINAL WIRE RANGE
MSN0960A300	800	480V	960 AMPS	875	(3) 600MCM-2AWG

CUSTOMER IS RESPONSIBLE FOR INSTALLATION TO MEET ALL NATIONAL AND LOCAL ELECTRICAL CODES.

NOTE: TORQUE WIRE TERMINAL TO 450 in-lb.

THE INFORMATION AND DESIGNS CONTAINED IN THIS DRAWING ARE CONFIDENTIAL AND THE PROPRIETARY PROPERTY OF ALLIED MOTION TECHNOLOGIES INC. AND ITS SUBSIDIARIES. NEITHER THIS DESIGN NOR ANY INFORMATION CONTAINED IN THIS DRAWING MAY BE REPRODUCED OR DISCLOSED TO OTHERS WITHOUT THE EXPRESS WRITTEN CONSENT OF ALLIED MOTION TECHNOLOGIES INC. AND ITS SUBSIDIARIES.				TOLERANCES (EXCEPT AS NOTED) DECIMAL .XX ± .25 .XXX ± .10		 MotorShield Sinewave Filter MSN0960A300, 480/3/60, Type 1/3R
E	6471 Added torque spec	11/2/23	JSG	FRACTIONAL ± 1/16	DATE: 07/22/15	
D	5579 Fan Tray Added	04/28/21	JRN	ANGULAR ± 1°	106087DG	
C	Drawing Update 4060	07/14/17	JSM	SCALE: 1/10	DATE: 07/22/15	
NO	REVISION	DATE	BY			