

4


3

2


1

Parts List			
TCI Part #	Description	Quantity	Item #
14927	Lug 250 kcmil	6	1
4631	Hex Hd Bolt 5/16-18 X 1 In	9	2
11619	Nut 5/16-18	9	3
1714	Flat Washer 5/16"	18	4
24916	Bus Bar	3	5
14928	Lug Two 2/0	1	6
2934	Hex Hd Bolt 1/4-20 X 3/4"	1	7
1505	Nut 1/4-20	1	8
1763	Flat Washer 1/4"	1	9


Lug Kit Part #LK02

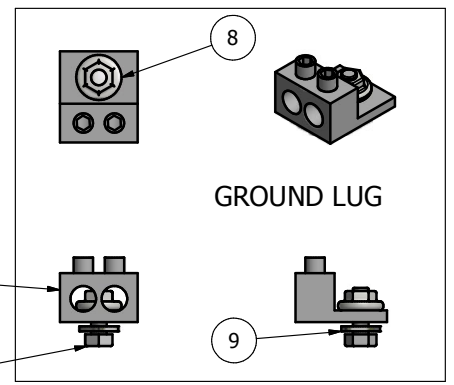



See Notes 2 & 8

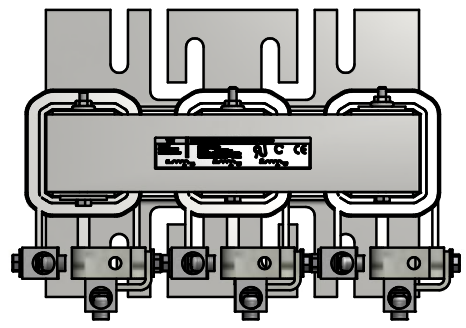

See Note 3
L1, L2, L3

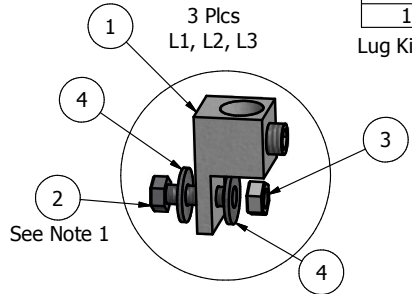


See Note 1

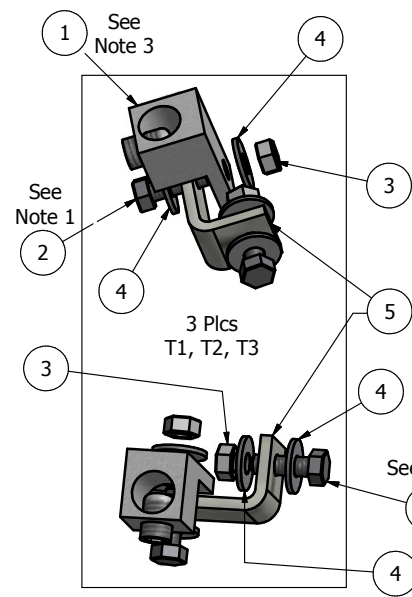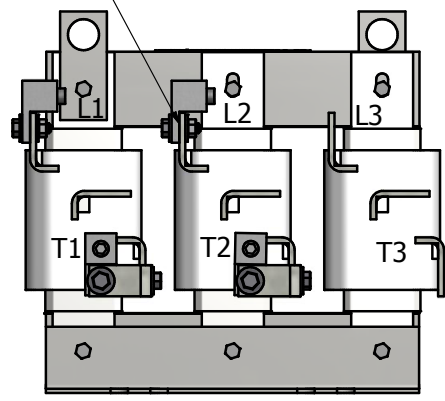

See Note 1

See Note 1

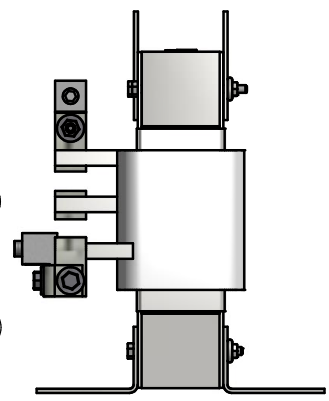

Notes:

- 1.) Torque bolts (Item #2) to 135 in-lb (15 N-m).
 - 2.) Torque bolt (Item #7) to 66 in-lb (7.5 N-m).
 - 3.) To prevent lug from rotating place lug on backside of tab as shown.
 - 4.) All terminals are rated for aluminum or copper wire.
 - 5.) Power terminals rating, 250 kcmil to 6 Awg.
 - 6.) Power terminals tightening torque is: 375 in-lbs (42 N-m).
 - 7.) Ground terminal rating two 2/0 to 14 Awg. Tightening torque Cu 50 in-lbs.
 - 8.) Use hole provided in enclosure bottom for mounting.
- CAUTION:** To ensure proper bonding lug should be metal to metal contact with enclosure.

Follow NEC guidelines to determine acceptable wire ampacity requirements.

TOLERANCES (EXCEPT AS NOTED)				TCI W132 N10611 Grant Drive Germantown, WI 53022	
DECIMAL				Lug Kit, 250MCM-6, And Copper Bus Connector, With Ground, 2-2/0-14	
.XX ± .03					
.XXX ± .010					
FRACTIONAL				DRN BY: DSW	
± 1/32				DATE: 7/18/16	
ANGULAR				LK02-Dwg	
± 1°				SCALE: 1" = 1"	
NO	REVISION	DATE	BY	SIZE	SHT 1 OF 1

4

3

2

1