
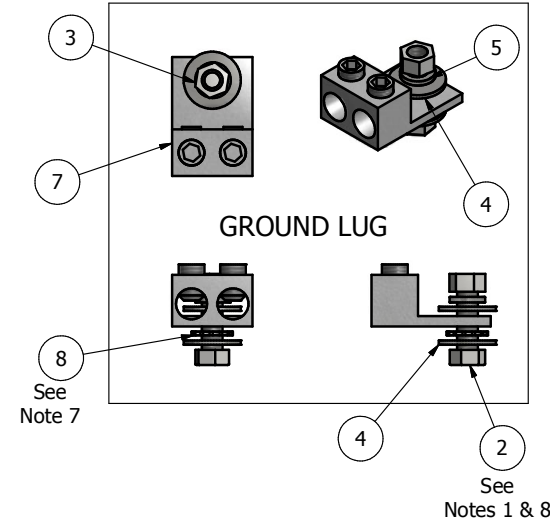


6 Plcs  
L1, L2, L3 & T1, T2, T3

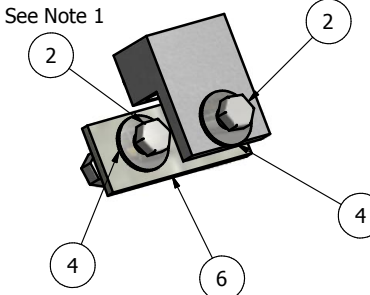

6 Plcs  
Bus Bars #6

Notes:

- 1.) Torque lug bolts (Item #2) to 450 in-lb (51 N-m).
- 2.) To prevent lug from rotating place lug on backside of tab as shown.
- 3.) All terminals are rated for aluminum or copper wire.
- 4.) Power terminal rating, two 600 kcmil to 4 Awg.
- 5.) Power terminal tightening torque 500 in-lb (56 N-m).
- 6.) Ground terminal rating two 350 kcmil to 6 Awg. Tightening torque 375 in-lbs (42 N-m).
- 7.) Star washer should be between the flat washer and the outside of the enclosure.
- 8.) Use hole provided in enclosure bottom for mounting. CAUTION: To ensure proper bonding lug should be metal to metal contact with enclosure.

Follow NEC guidelines to determine acceptable wire ampacity requirements.

TABLE			
TCI Part #	Description	Quantity	Item #
11236	Lug Two 600 kcmil	6	1
2401	Hex Hd Bolt 1/2-13 X 1 1/2 In	13	2
1610	Nut 1/2-13	13	3
1512	Flat Washer 1/2"	26	4
1511	Split Lock Washer 1/2"	13	5
27708	Bus Bar	6	6
13572	Lug Two 350 kcmil	1	7
12454	Star Washer 1/2"	1	8

Lug Kit Part #LK05

TOLERANCES (EXCEPT AS NOTED)				TCI W132 N10611 Grant Drive Germantown, WI 53022	
DECIMAL				Lug Kit, 2-600MCM-4, And Copper Bus Connector, With Ground, 2-350MCM-6	
				.XX ± .03	
				.XXX ± .010	
FRACTIONAL				DRN BY: DSW	
				DATE: 7/18/16	
				APRVD: LK05-Dwg	
				SCALE: B	
				SIZE: B	
				SHT 1 OF 1	

NO	REVISION	DATE	BY