Parts List			
TCI Part #	Description	Quanity	Item #
11632	Lug 600 kcmil	6	1LK
3556	Hex Hd Bolt 3/8-16 X 1 1/4 In	6	2LK
11626	Nut 3/8-16	6	3LK
1509	Flat Washer 3/8"	12	4LK

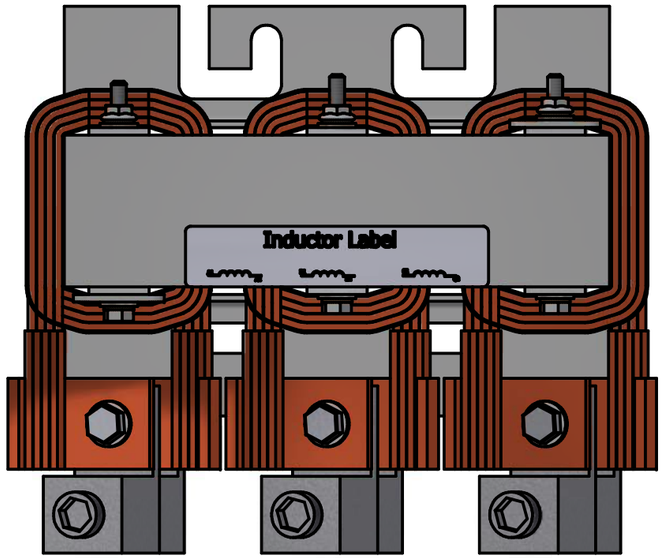

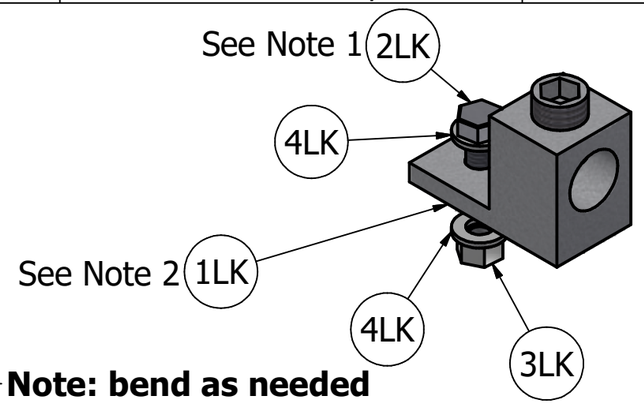

6 Plcs
A1, B1, C1
A2, B2, C2

Note: bend as needed to access PT Termination.

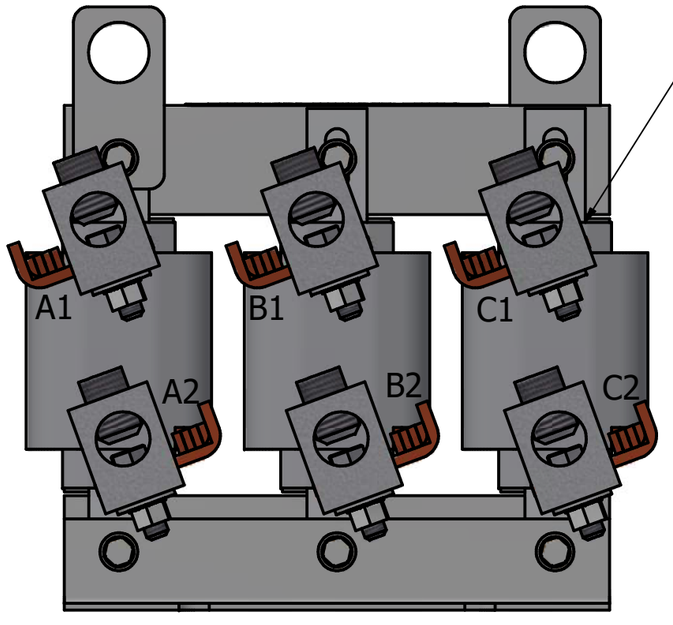

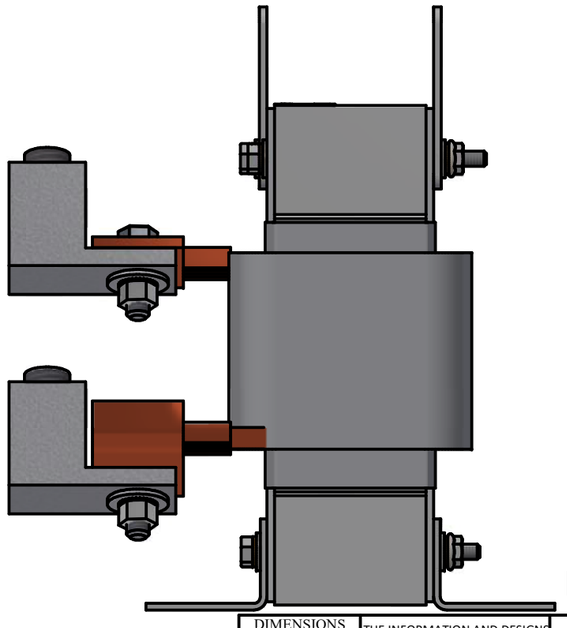

Connectors
International Hydraulics Inc.
ihiconnectors.com ®

200116

Listed 84JM
ZMVV
E129884

Pressure Terminal Connectors

NRTL Cat. No.
S600

600kcmil-4 AL9CU

Wire Size Copper (solid to semi-rigid stranded and metric mm², ##)	All Torque in in-lbs. For N-M divide by 8.85.			
	Rating °C	Wire Size FLEX Copper (#)	Wire Size aluminum	Torque (all drive means)
600-4	90	444-2	600-4	500

(#) FLEX - covers stranding classes within G, H, I/DLO, Metric class5 and K/MTW.(##) mm2 sizes within AWG/kcmil ranges are included.

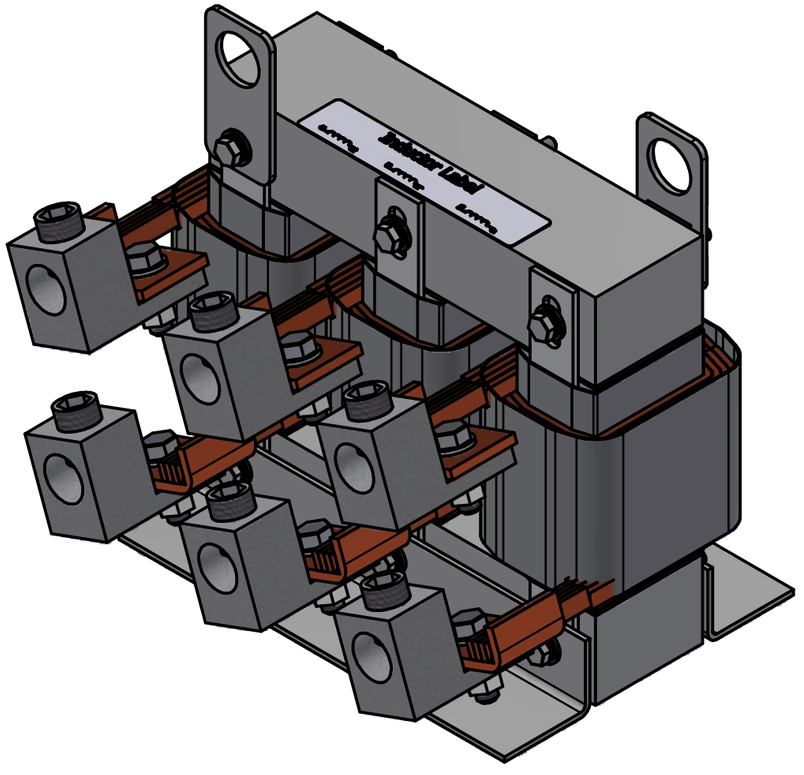

Follow NEC guidelines to determine acceptable wire ampacity requirements.

Notes:
1.) Torque bolt (Item #2LK) to 200 in-lb (22.6 N-m).
2.) To prevent lug from rotating place lug on underside of tab as shown.

DIMENSIONS IN INCHES (EXCEPT AS NOTED)
TOLERANCES (EXCEPT AS NOTED)
DECIMAL
.XX ± .25
.XXX ± .10
FRACTIONAL
± 1/32
ANGULAR
± 1°

THE INFORMATION AND DESIGNS CONTAINED IN THIS DRAWING ARE CONFIDENTIAL AND THE PROPRIETARY PROPERTY OF ALLIENT INC. AND ITS SUBSIDIARIES. NEITHER THIS DESIGN NOR ANY INFORMATION CONTAINED IN THIS DRAWING MAY BE REPRODUCED OR DISCLOSED TO OTHERS WITHOUT THE EXPRESS WRITTEN CONSENT OF ALLIENT INC. AND ITS SUBSIDIARIES.

NO	ECO	REVISION	DATE	BY
A	7543	Add Note: Bend As Needed To Access PT		

DRN. BY: JRN
DATE: 08/30/17

Allient Power
W132N10611 Grant Drive
Germantown, WI 53022
© 2026 Allient Inc.

SLK12
Lug Kit, 600MCM-4

SCALE: NONE
DRN. NO. LK12-DWG
SIZE B
SHT.1 OF 1