



CUSTOMER CONNECTIONS

75 HP AND BELOW : USE MINIMUM 60°C COPPER WIRE  
 ABOVE 75 HP : USE MINIMUM 75°C COPPER WIRE

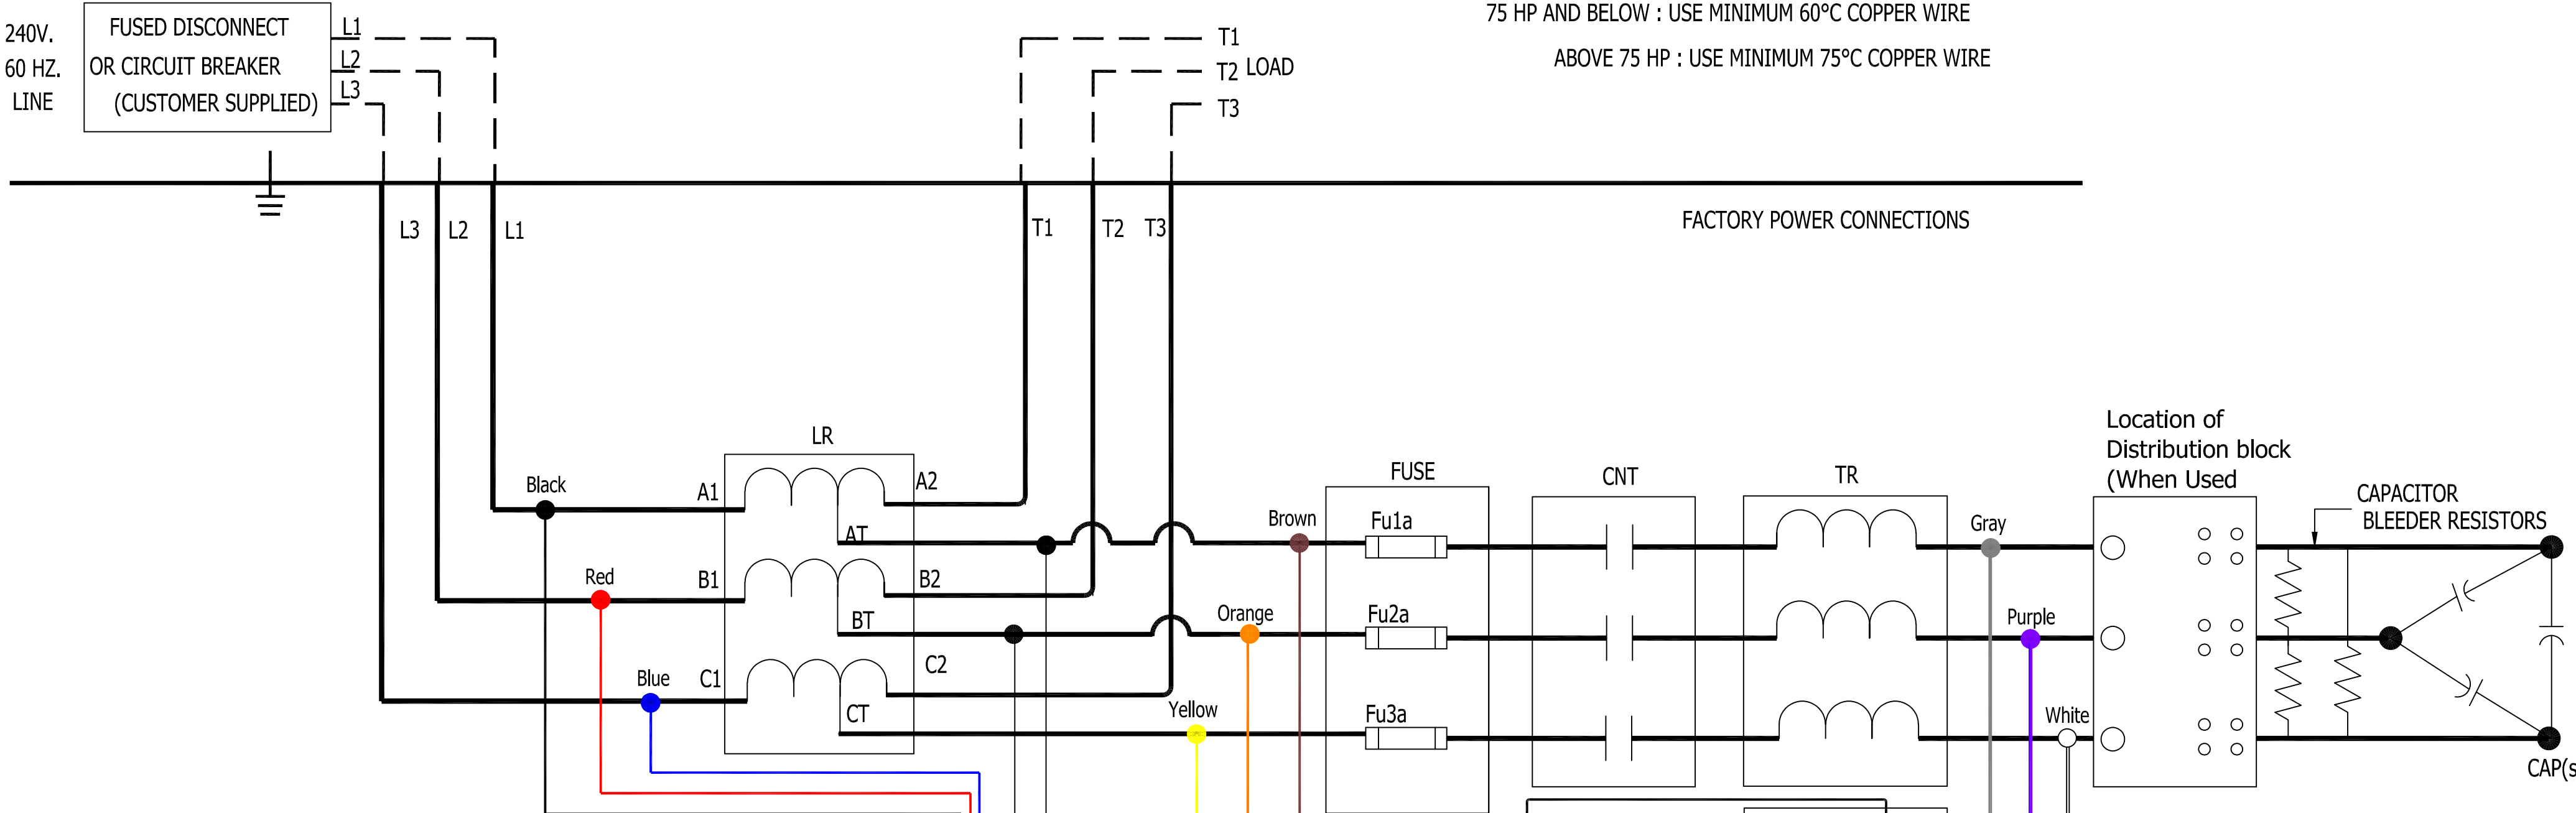

CONTROL CONNECTIONS

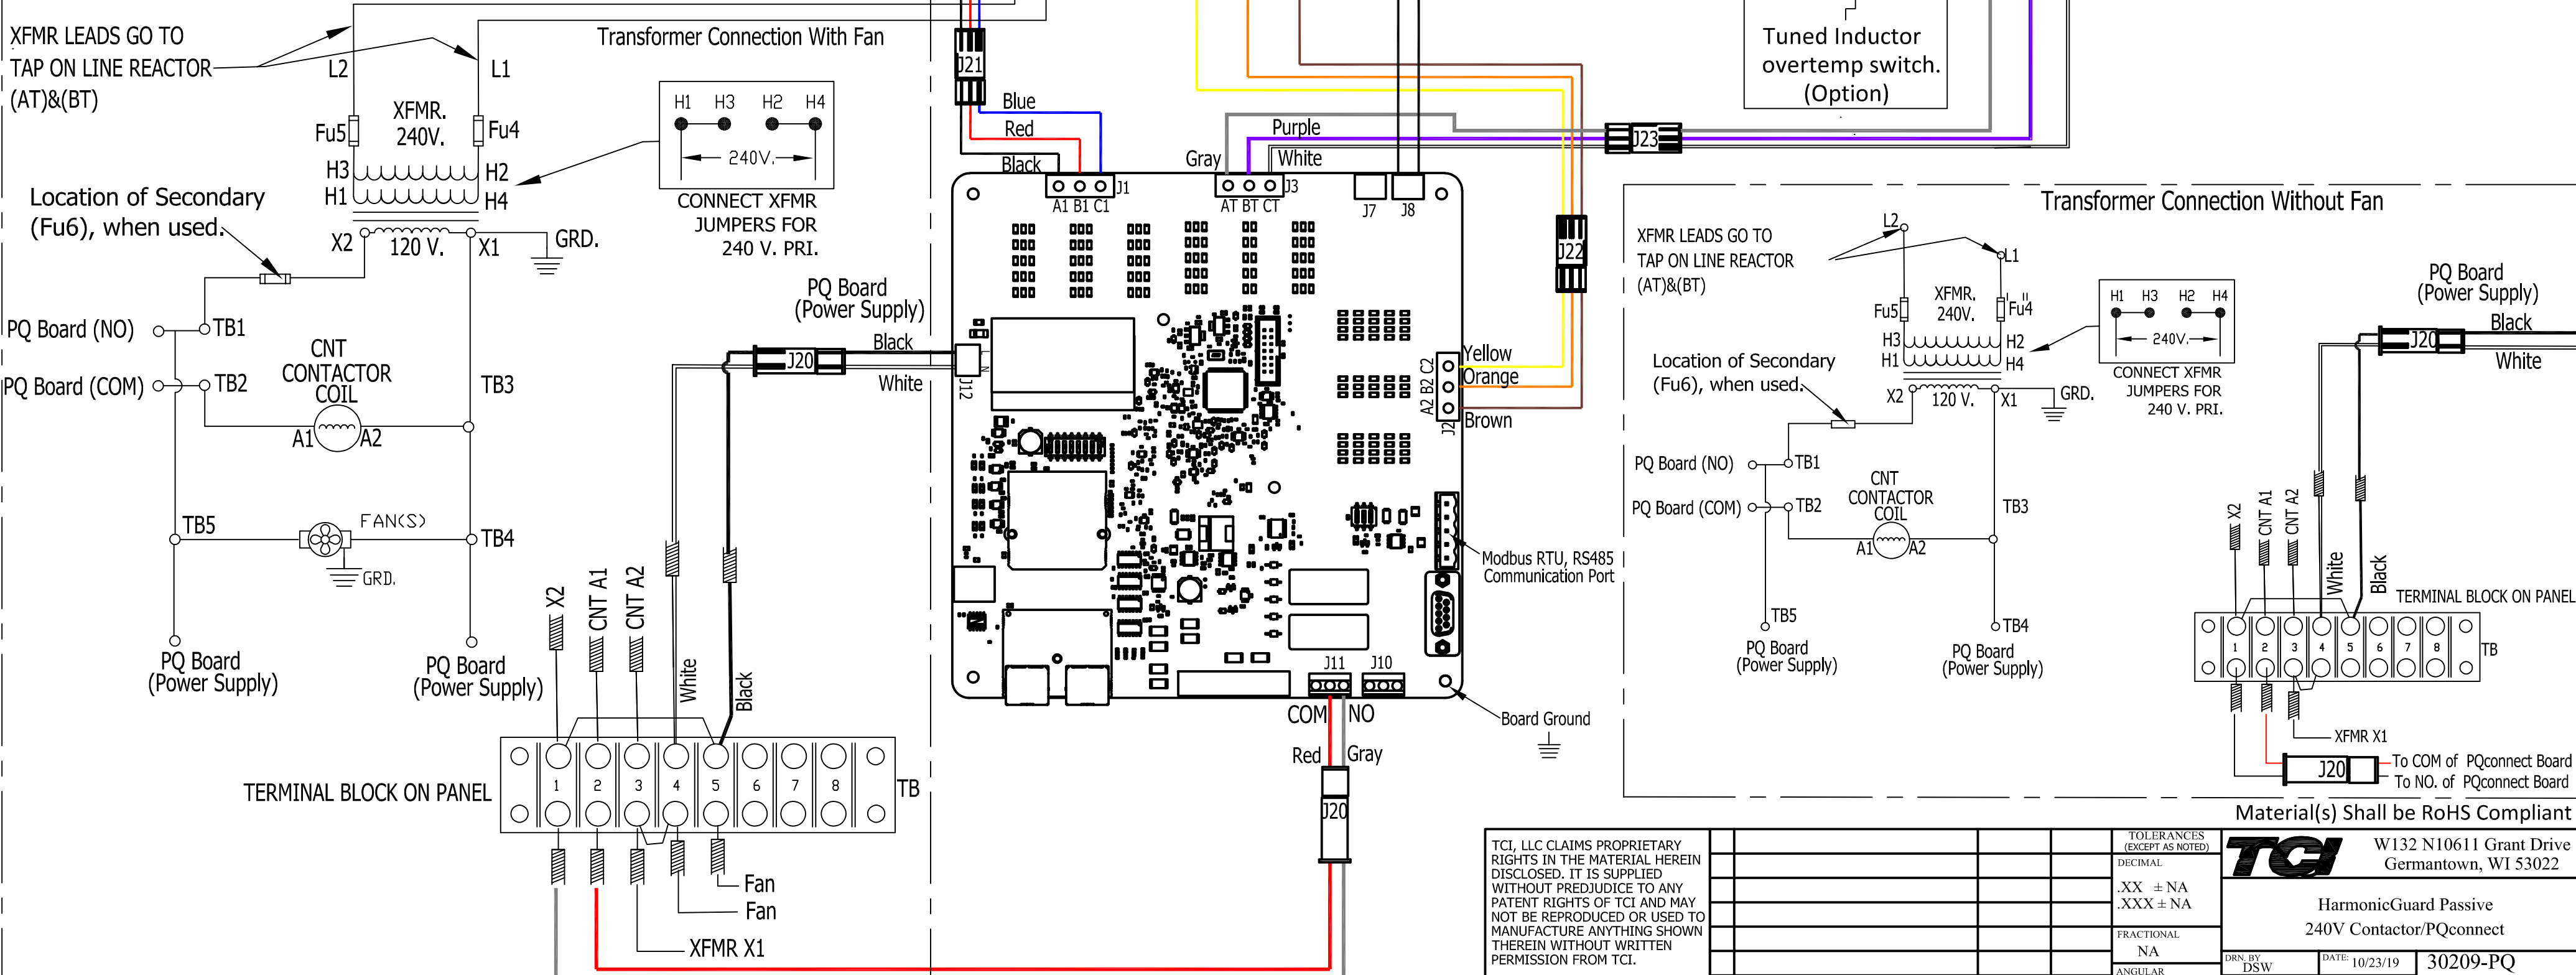

TCI, LLC CLAIMS PROPRIETARY RIGHTS IN THE MATERIAL HEREIN DISCLOSED. IT IS SUPPLIED WITHOUT PREJUDICE TO ANY PATENT RIGHTS OF TCI AND MAY NOT BE REPRODUCED OR USED TO MANUFACTURE ANYTHING SHOWN THEREIN WITHOUT WRITTEN PERMISSION FROM TCI.				TOLERANCES (EXCEPT AS NOTED) DECIMAL .XX ± NA .XXX ± NA FRACTIONAL NA ANGULAR NA		W132 N10611 Grant Drive Germantown, WI 53022	
				HarmonicGuard Passive 240V Contactor/PQconnect		30209-PQ	
NO	REVISION	DATE	BY	DRN: DSW	SCALE: NA	DATE: 10/23/19	APRVD: C
							SHT. 1 OF 1

Material(s) Shall be RoHS Compliant