


CUSTOMER CONNECTIONS

75 HP AND BELOW : USE MINIMUM 60°C COPPER WIRE

ABOVE 75 HP : USE MINIMUM 75°C COPPER WIRE

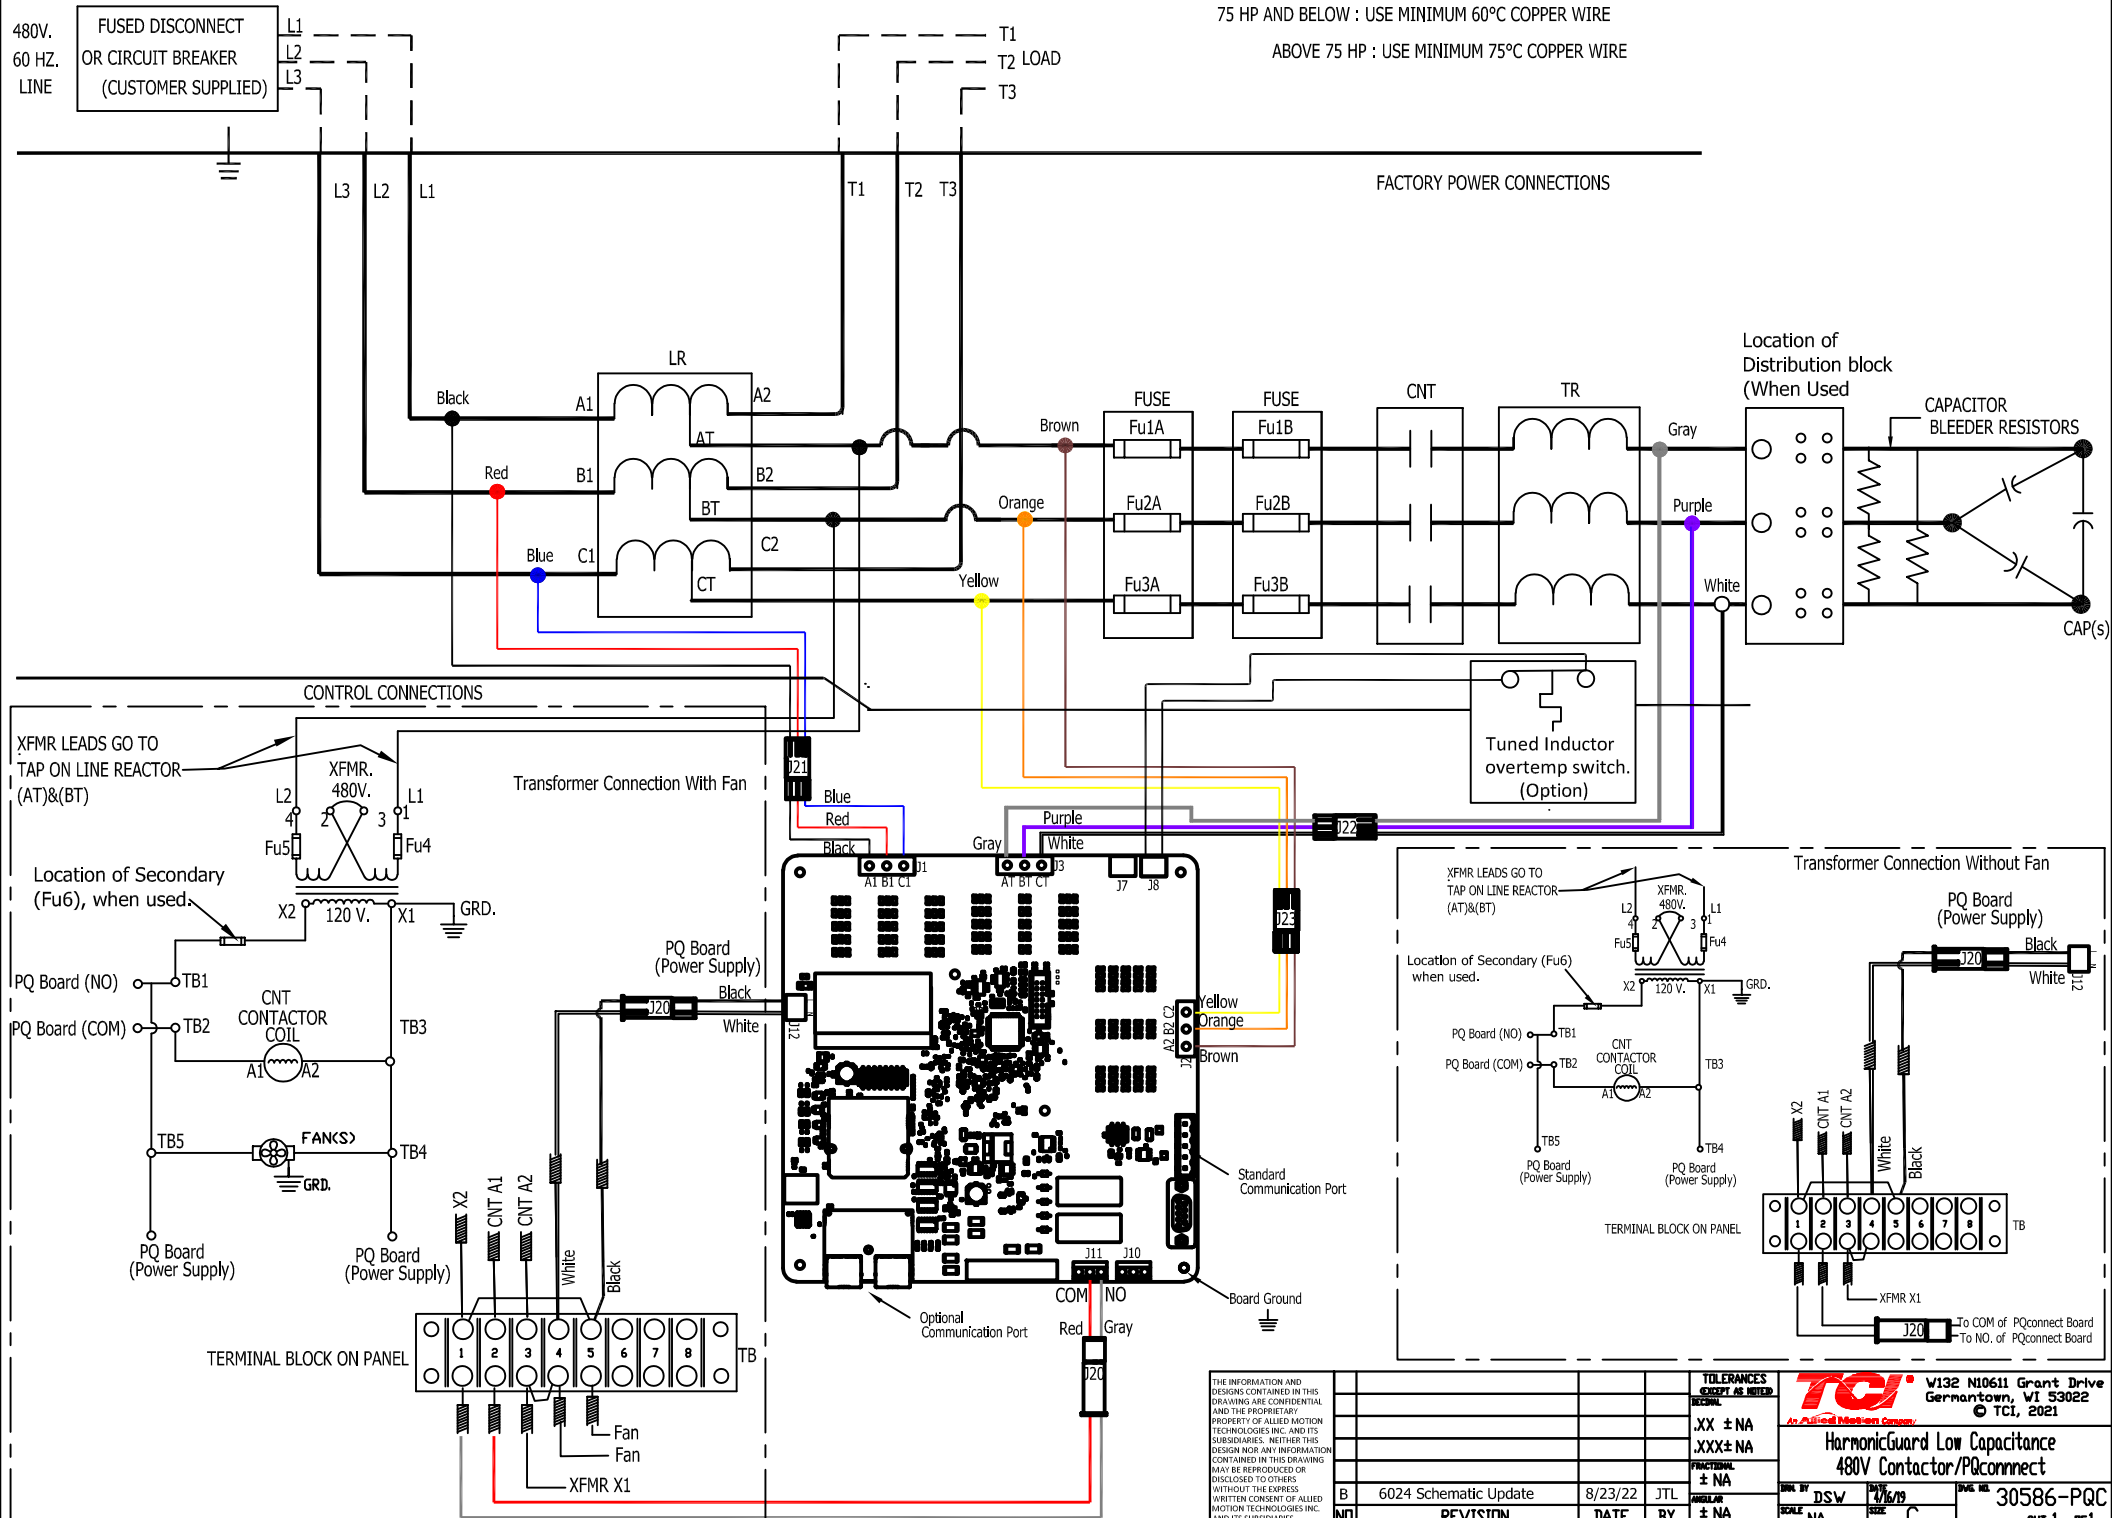

THE INFORMATION AND DESIGNS CONTAINED IN THIS DRAWING ARE CONFIDENTIAL AND THE PROPRIETARY PROPERTY OF ALLIED MOTION TECHNOLOGIES INC. AND ITS SUBSIDIARIES. NEITHER THIS DESIGN NOR ANY INFORMATION CONTAINED IN THIS DRAWING MAY BE REPRODUCED OR DISCLOSED TO OTHERS WITHOUT THE EXPRESS WRITTEN CONSENT OF ALLIED MOTION TECHNOLOGIES INC. AND ITS SUBSIDIARIES.

NO	REVISION	DATE	BY
B	6024 Schematic Update	8/23/22	JTL
NO			

**TOLERANCES UNLESS OTHERWISE SPECIFIED**

.XX ± NA  
.XXX ± NA  
FRACTIONAL ± NA  
ANGULAR ± NA

**TCT** W132 N10611 Grant Drive Germantown, WI 53022 © TCT, 2021

**HarmonicGuard Low Capacitance 480V Contactor/PQconnect**

DESIGNED BY DSW DATE 1/6/19 SCALE NA  
DRAWN BY JTL DATE 8/23/22 SIZE C

30586-PQC SHT.1 OF 1