

600V.
60 HZ.
LINE

FUSED DISCONNECT
OR CIRCUIT BREAKER
(CUSTOMER SUPPLIED)


CUSTOMER CONNECTIONS

T1
T2
T3 LOAD

CUSTOMER CONNECTIONS

75 HP AND BELOW : USE MINIMUM 60°C COPPER WIRE
ABOVE 75 HP : USE MINIMUM 75°C COPPER WIRE

FACTORY POWER CONNECTIONS

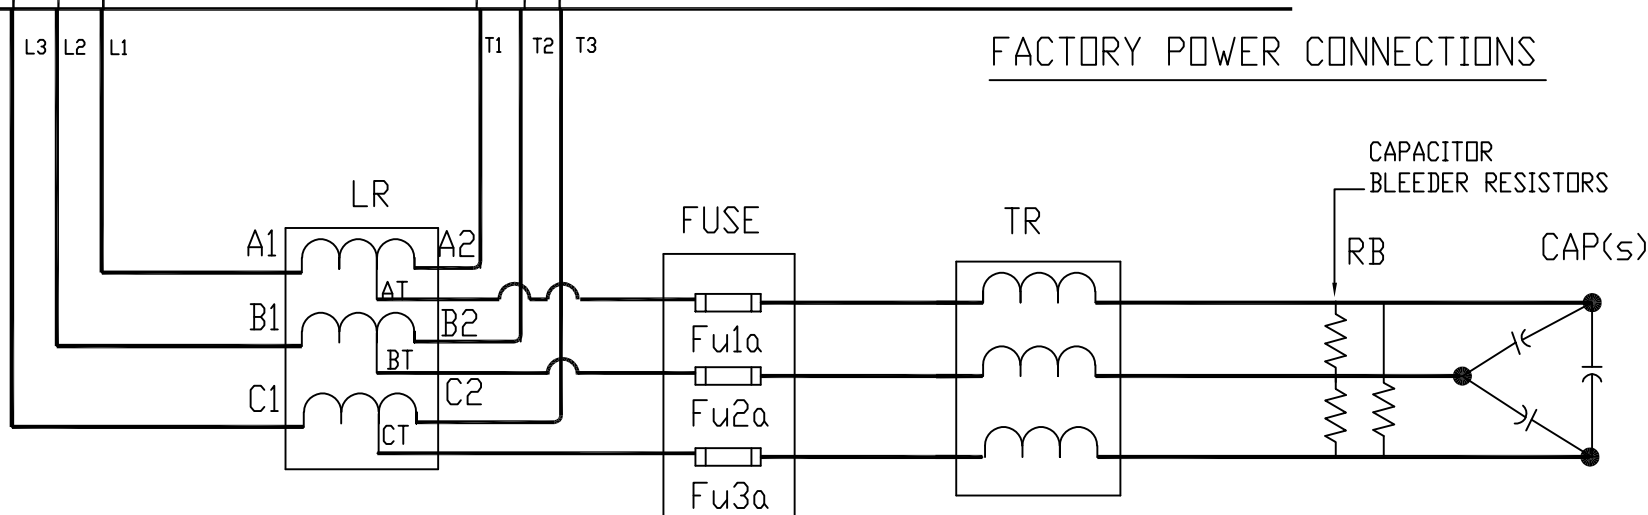

<p>TCl, LLC CLAIMS PROPRIETARY RIGHTS IN THE MATERIAL HEREIN DISCLOSED. IT IS SUPPLIED WITHOUT PREJUDICE TO ANY PATENT RIGHTS OF TCl AND MAY NOT BE REPRODUCED OR USED TO MANUFACTURE ANYTHING SHOWN THEREIN WITHOUT WRITTEN PERMISSION FROM TCl.</p>						<p>TOLERANCES EXCEPT AS NOTED: DECIMAL .XX ± NA .XXX ± NA FRACTIONAL ± NA ANGULAR ± NA</p>	<p>TCl W132 N10611 GRANT DRIVE GERMANTOWN, WI 53022 HARMONICGUARD PASSIVE 600V SCHEMATIC 15HP, 30HP TO 150HP, OPEN 15HP, 30HP TO 150HP, TYPE1</p>	
	A	As Designed	6/26/19	DSW		<p>DRN BY DSW SCALE NONE</p>		<p>DATE 6/26/19 SIZE C</p>
	NO	REVISION	DATE	BY		<p>DWG. NO. 31663-S SHT.1 OF 1</p>		