


CATALOG NO	VOLTAGE	NEC MOTOR HP	NEC MOTOR CURRENT	WATTS LOSS	APPROX. WEIGHT-LBS
KDRI2HC4	480	100	124	297	85

NOTE 1: WATTS LOSS WILL VARY DUE TO FUNDAMENTAL FREQUENCY, CARRIER FREQUENCY AND OTHER SYSTEM CHARACTERISTICS.  
 KDR DRIVE REACTORS COMPLY WITH THE THERMAL AND ALTITUDE STANDARDS SET FORTH BY NEMA ST20-1992..

<b>TCI</b> TRANS-COIL, INC MILWAUKEE WI WWW.transcoil.com 800-824-8282 [DATE CODE]	<b>PERFORMANCE AND PROTECTION FOR DRIVES.</b>	
	KDR Drive Reactor	
	CATALOG#	MOTOR HP AMPS
	3PH, 60Hz, 600V Max, [---] A Max. 40C Amb Max, 155C Rise	

ENCLOSURE LABEL PLACED ON FRONT COVER.

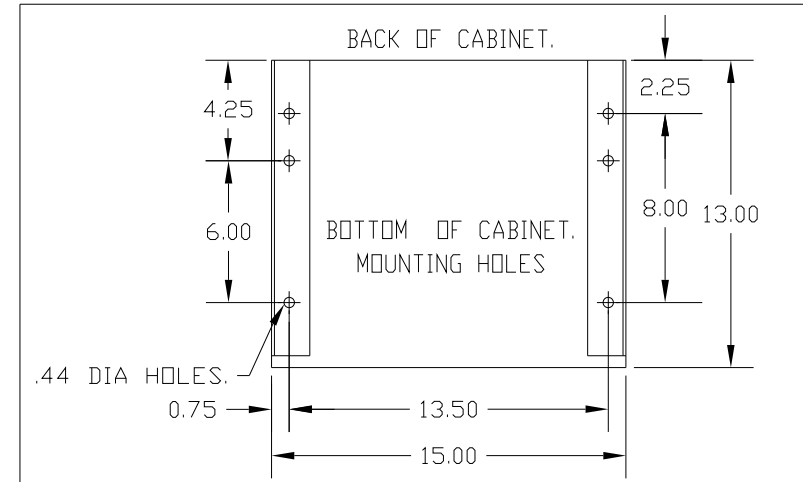

CUSTOMER IS RESPONSIBLE FOR INSTALLATION TO MEET ALL NATIONAL AND LOCAL ELECTRICAL CODES.

				<b>TOLERANCES (EXCEPT AS NOTED)</b> DECIMAL .XX ± .03 .XXX ± .01 FRACTIONAL ± 1/32 ANGULAR ± 1/2°		<b>TCI</b> 7878 N. 86th STREET MILWAUKEE, WI 53224	
				KDR ASSEMBLY, "I" FRAME "C4" ENCL., KDRI2H			
NO		REVISION	DATE	BY	DRN BY DSW	DATE 01/17/05	DWG NO B
				SCALE 3/16"=1"	APPRVD.	KDR-101DG SHT.1 OF 1	