
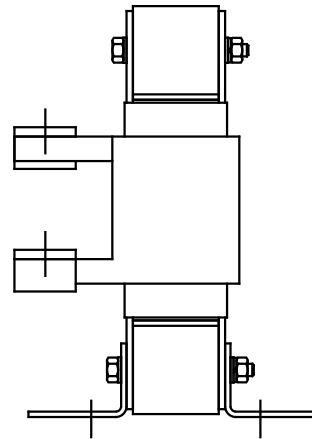


CATALOG NO	VOLTAGE	NEC MOTOR HP	NEC MOTOR CURRENT	WATTS LOSS	APPROX WT-LBS	TORQUE (LB-IN)
KDRI32P	575	200	192	SEE NOTE 1	45	--


**TCI** Performance and Protection for Drives.

<p>TRANS-COIL, INC MILWAUKEE WI WWW.transcoil.com 800-824-8282</p>	<p>KDR Drive Reactor CATALOG # [ ] Motor Amps [ ] 3PH, 60Hz, 600V Max, [ ] A Max. 40C Amb Max, 155C Rise</p>
--	--

NOTE 1: WATTS LOSS WILL VARY DUE TO FUNDAMENTAL FREQUENCY, CARRIER FREQUENCY AND OTHER SYSTEM CHARACTERISTICS. KDR DRIVE REACTORS COMPLY WITH THE THERMAL AND ALTITUDE STANDARDS SET FORTH BY NEMA ST20-1992..

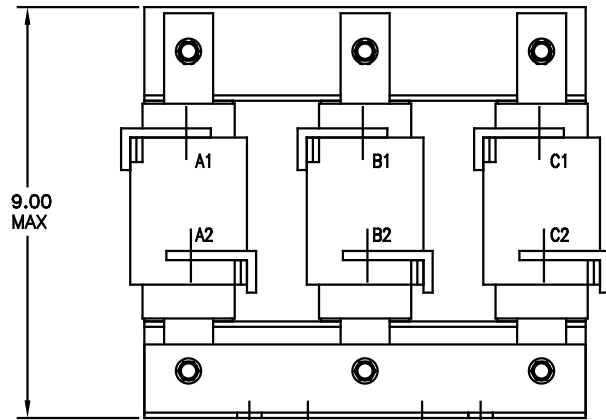

NOTE: A1, A2, B1, B2, C1, C2, MARKINGS ON COIL FOR REFERENCE ONLY.

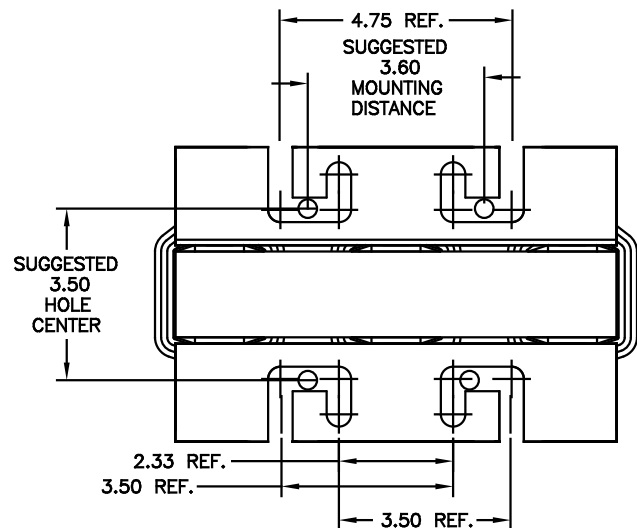

				TOLERANCES (UNLESS AS NOTED)		<b>TCI</b> 7878 N. 86th STREET MILWAUKEE, WI 53224	
				DECIMAL	FRACTIONAL		
				.XX ±.03		<b>KDR DRIVE REACTOR</b> 575 V, OUTPUT, "I" FRAME NO. [ ] REVISION [ ] DATE [ ] BY [ ] SCALE 1/2"=1"	
				.XXX±.01			
				± 1/32			
				± 1/2"			
						KDR132PDG SH. 1 OF 1	