
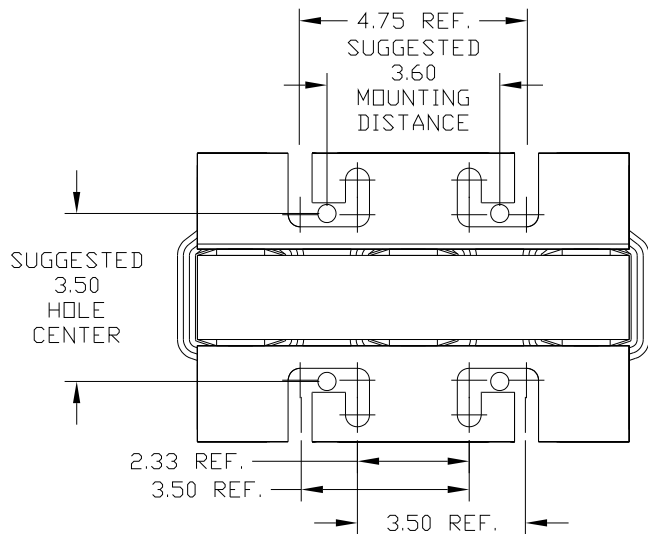
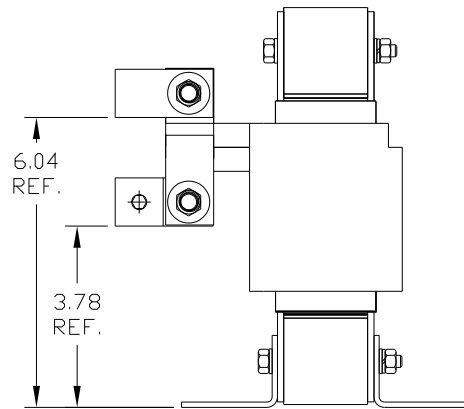


CATALOG NO	VOLTAGE	NEC MOTOR HP	NEC MOTOR CURRENT	WATTS LOSS	APPROX. WEIGHT-LBS
KDRULI42L	575/600	200	192	342	56

NEC MOTOR CURRENTS SHOWN IN THE 208/240 VOLT CHART ARE BASED ON HORSEPOWER AT 208 VOLT. 575/600 VOLT CHART USE THE 575 VOLT CURRENT RATING.

LUG WIRE RANGE 250MCM-6, AL OR CU.  
FOR REACTOR.  
TIGHTENING TORQUE. 275 LB-IN

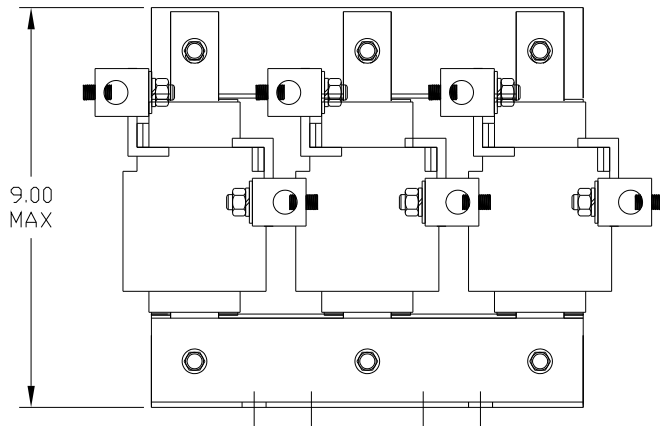

<b>TCI</b> TRANS-COIL, INC MILWAUKEE WI WWW.transcoil.com 800-824-8282	<b>Performance and Protection for Drives.</b> KDR Drive Reactor		
	CATALOG# <input type="text"/> Motor Amps ---	3PH, 60Hz, 600V Max, --- A Max. 40C Amb Max, 155C Rise Terminal Torque <input type="text"/> LB-IN.	
DATE 6/2004			

				TOLERANCES (EXCEPT AS NOTED) DECIMAL .XX ±.03 .XXX ±.01 FRACTIONAL ± 1/32 ANGULAR ± 1/2°		7878 N. 86th STREET MILWAUKEE, WI 53224	
				KDRUL OPEN (FRAME I) KDR DRIVE REACTOR			
NO	REVISION	DATE	BY	DRN BY	DATE	DWG NO.	APPROV
				DSW	04/30/04	KDRULOPEN-150G	
				SCALE	1/2"=1"	SHT. 1	OF 1