
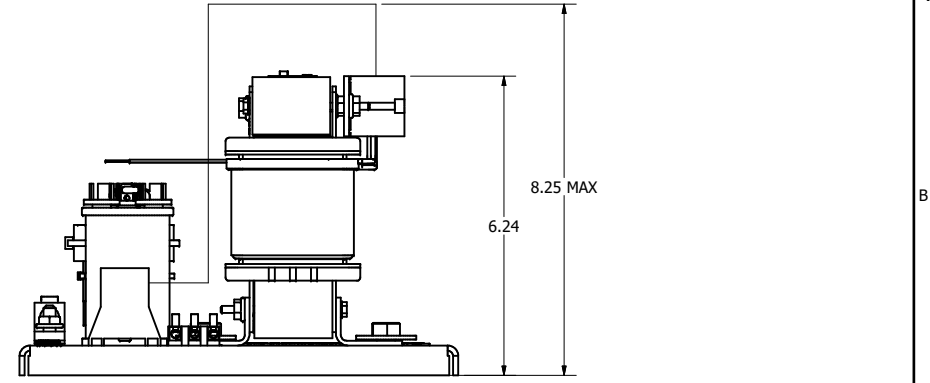
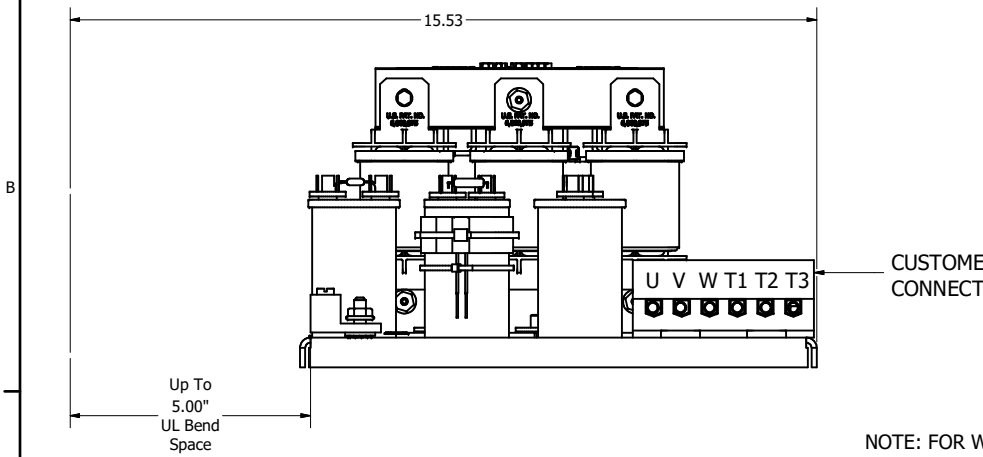
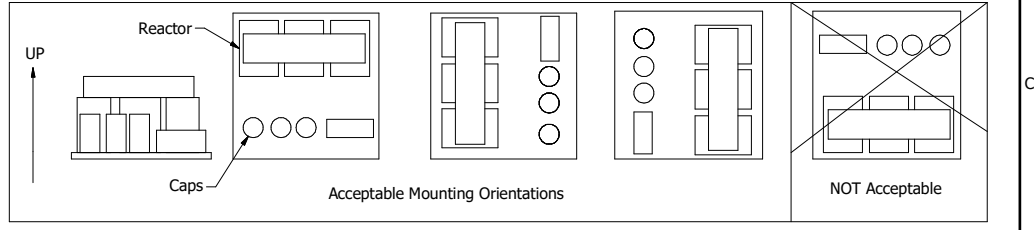
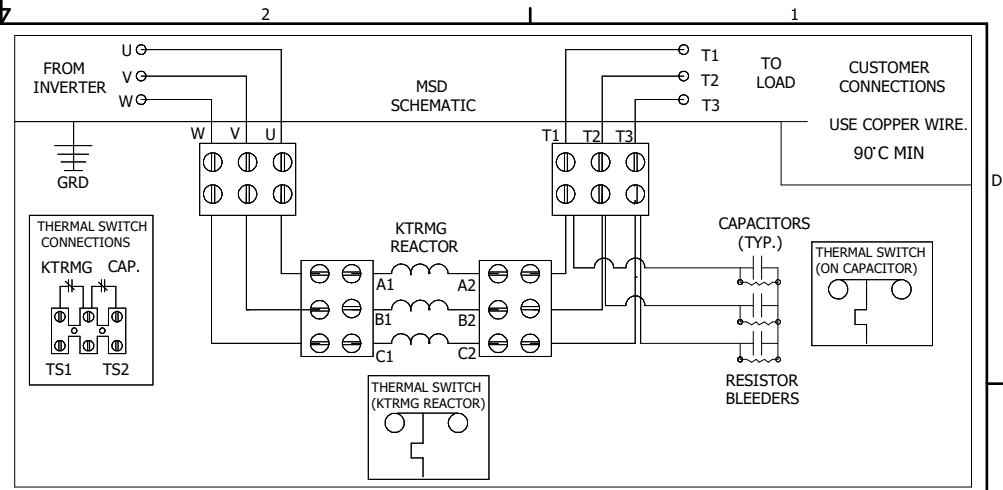


MSD PART NUMBER	HP	VOLT	CURRENT	WEIGHT	TERMINAL BLOCK	GROUND LUG
MSD0008C000	5	600V	8 Amps	40LBS	WIRE RANGE: 1-22AWG	WIRE RANGE: 1/0-14AWG
MSD0010C000	7.5	600V	10 Amps	40LBS	WIRE RANGE: 1-22AWG	WIRE RANGE: 1/0-14AWG
MSD0012C000	10	600V	12 Amps	40LBS	WIRE RANGE: 1-22AWG	WIRE RANGE: 1/0-14AWG

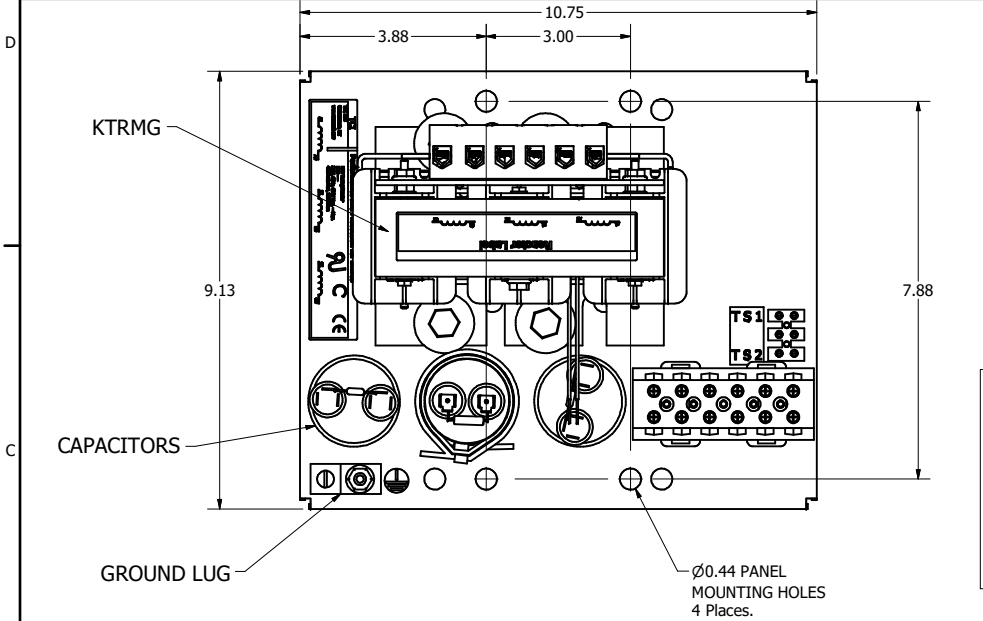

NOTE: FOR WIRE RANGE AND TORQUE INFORMATION SEE IOM MANUAL.

CUSTOMER IS RESPONSIBLE FOR PROPER COOLING OF FILTER COMPONENTS
CAPACITORS MAXIMUM AMBIENT 50°C

CUSTOMER IS RESPONSIBLE FOR INSTALLATION TO MEET ALL NATIONAL AND LOCAL ELECTRICAL CODES.



CAPACITOR DISCHARGE LABEL TO SHIP WITH PANEL

DIMENSIONS IN INCHES (EXCEPT AS NOTED)		TOLERANCES (EXCEPT AS NOTED)		DECIMAL		FRACTIONAL		ANGULAR		THE INFORMATION AND DESIGN CONTAINED IN THIS DRAWING ARE CONFIDENTIAL AND THE PROPRIETARY PROPERTY OF ALLIANT INC. AND ITS SUBSIDIARIES. NEITHER THIS DESIGN NOR ANY INFORMATION CONTAINED IN THIS DRAWING MAY BE REPRODUCED OR DISCLOSED TO OTHERS WITHOUT THE EXPRESS WRITTEN CONSENT OF ALLIANT INC. AND ITS SUBSIDIARIES.		DESIGNED BY		DATE		DRAWN BY		SCALE		DEN. NO.		SIZE		
XX	± .03	.XXX	± .010										JRN	02/14/19	JRN	1/2	108013DG	C	SHT.1 OF 1					
D	7265	Update Wire Clearance											JRN	10/17/25	TJS									
B	6884	Fix Table Category											JRN	12/04/24	JRN									
C	4670	Additional Options Added											JRN	03/15/19	JRN									
A		As Designed											JRN	02/14/19	JRN									
NO	ECO	REVISION																						



MotorShield Sinewave Filter
8 Amp, 600/3/60, Open

W132N10611 Grant Drive
Germantown, WI 53022
© 2025 Alliant Inc.