



| VOLTAGE | NEC MOTOR HP | CATALOG NO | NEC MOTOR CURRENT | AMPS MAX | WATTS LOSS | APPROX WT-LBS |
|---------|--------------|------------|-------------------|----------|------------|---------------|
| 690V | | | | | | |
| HIGH-Z | .50 | KDRA55HV | .90 | 1.5 | 8 | 4 |

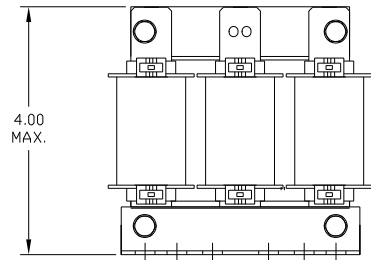

TCI PERFORMANCE AND PROTECTION FOR DRIVES.

TRANS-COIL, INC
MILWAUKEE WI
WWW.transcoil.com
800-824-8282


KDR Drive Reactor

CATALOG# MOTOR HP AMPS

3PH, 50/60Hz, 690V Max, --- A Max. RoHS

DATE CODE A1 A2 B1 B2 C1 C2

UL[®] US CE

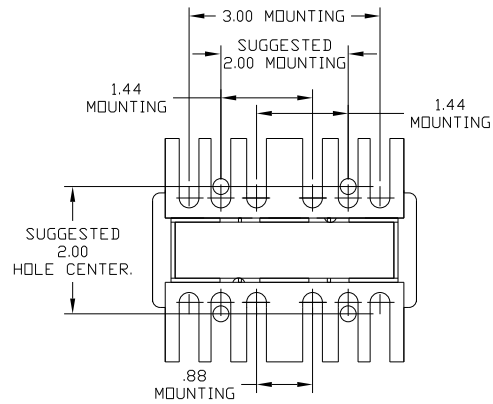

| NO | REVISION | DATE | BY | TOLERANCES (EXCEPT AS NOTED) | 7878 N. 86th STREET MILWAUKEE, WI 53224 |
|----|----------|------|----|------------------------------|---|
| | | | | DECIMAL | TCI KDR DRIVE REACTOR 690V HIGH Z, FRAME A |
| | | | | .XX ± .03 | |
| | | | | .XXX ± .01 | |
| | | | | FRACTIONAL ± 1/32 | |
| | | | | ANGULAR ± 1/2° | DRN. BY DSW DATE 02/07/07 DVG. NO. B KDRA55HVDG |
| | | | | | SCALE TO FIT APRVD. SHT. 1 OF 1 |