

KMG362C00A  
 APPROX WEIGHT: 579LBS

KMG HIGH PERFORMANCE OUTPUT FILTER


PART NUMBER: KMG362C00A  
 FLA: 362  
 SYSTEM VOLTAGE: 600  
 HZ: 80  
 PHASE: 3

DRAWING#: 104430DG  
 SCHEMATIC: 24281-23A

MOTORGUARD

CAPACITORS

INDUCTOR

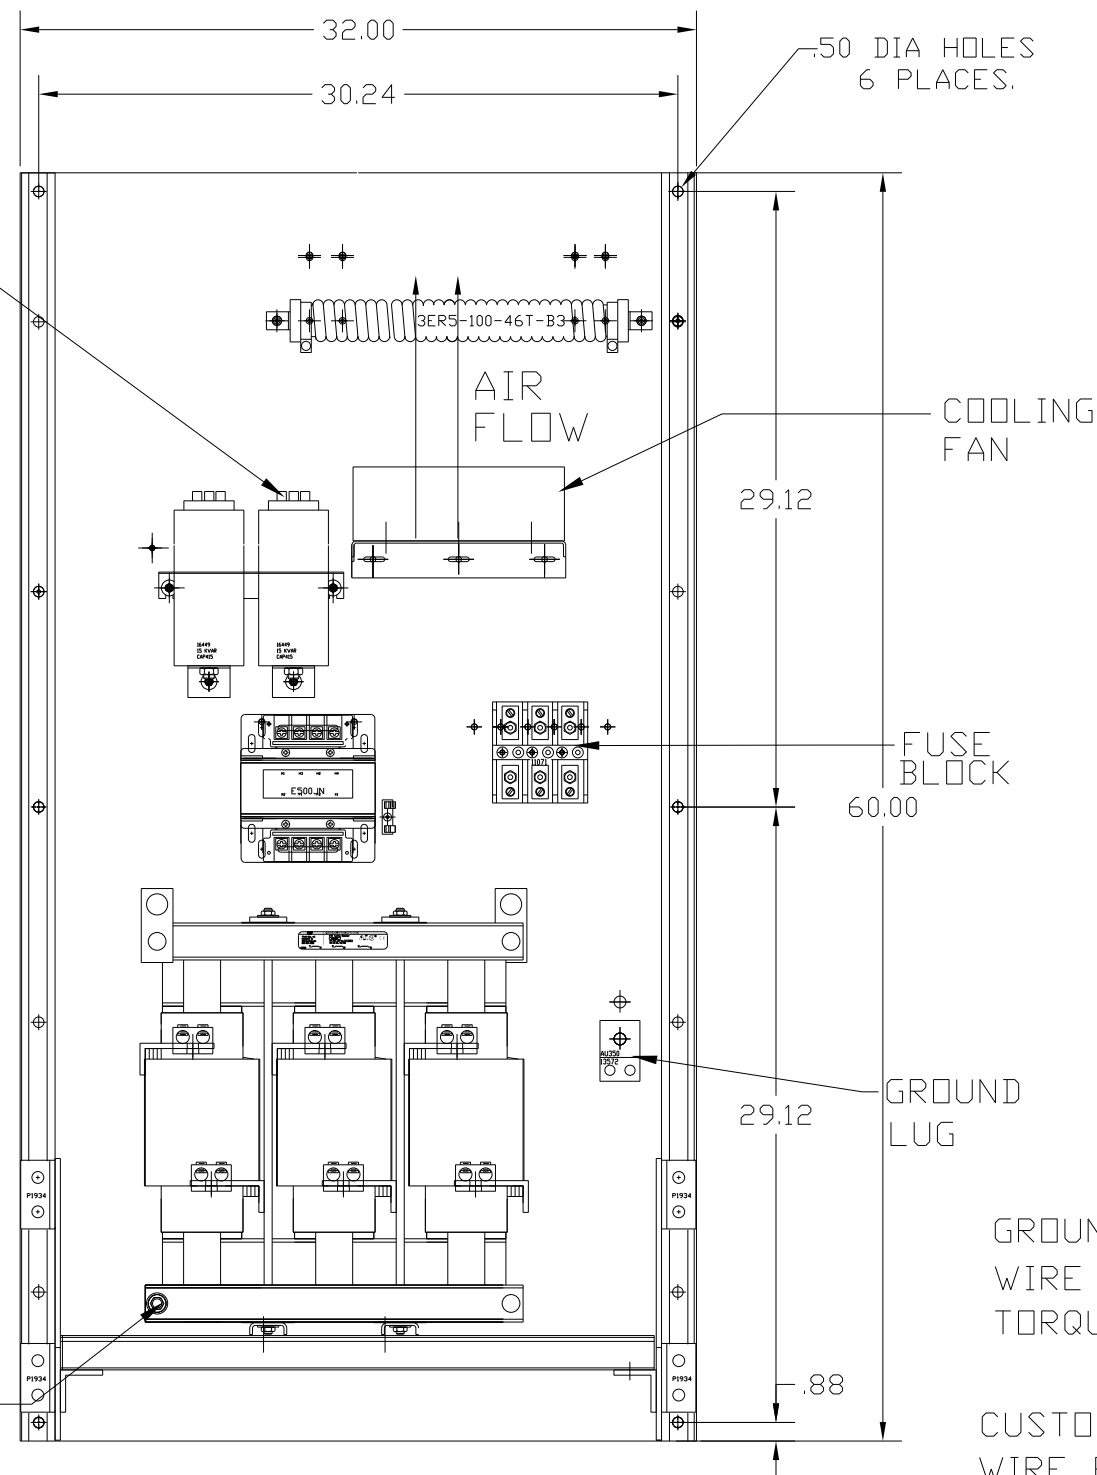

RESISTOR ASSEMBLY

AIR FLOW


TRANSFORMER

CUST. INPUT

CUST. OUTPUT

GROUND LUG  
 WIRE RANGE: 350MCM- #4 AWG  
 TORQUE: 275 LB-IN

CUSTOMER CONNECTIONS  
 WIRE RANGE: (2)350MCM- #4 AWG  
 TORQUE: 275 LB-IN

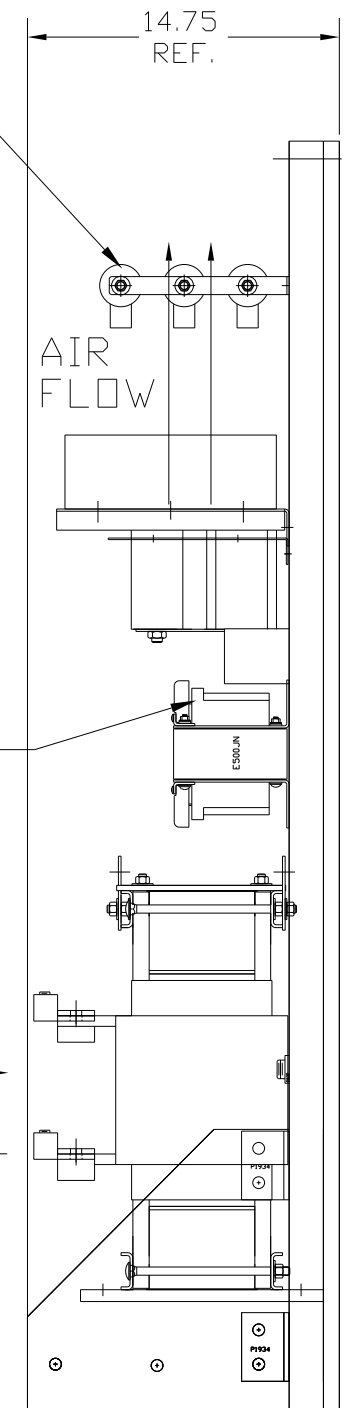

FOR SCHEMATIC SEE DRAWING P/N 24281-23A

CUSTOMER IS RESPONSIBLE FOR PROPER COOLING OF COMPONENTS IN CUSTOMERS ASSEMBLY

CUSTOMER IS RESPONSIBLE FOR PROPER INSTALLATION OF ASSEMBLY IN ACCORDANCE WITH LOCAL AND NATIONAL CODES.

NO	REVISION	DATE	BY

TOLERANCES  
 (EXCEPT AS NOTED)  
 DECIMAL  
 .XX ± .02  
 .XXX ± .01  
 FRACTIONAL  
 ± 1/32  
 ANGULAR  
 ± 1/2°

**TCL** 7878 N. 86th STREET  
 MILWAUKEE, WI 53224

Standard, SineWave Filter  
 Open, 350HP, 362AMP, 600V

DRN. BY DSW DATE 10/12/2010 DWG. NO. 104430DG  
 SCALE TO FIT APRVD. B SH. 1 OF 1