

KMG600C00A
 APPROX WEIGHT: 749LBS


KMG HIGH PERFORMANCE OUTPUT FILTER

PART NUMBER: KMG600C00A
 FLA: 600
 SYSTEM VOLTAGE: 600
 HZ: 80
 PHASE: 3

DRAWING#: 104433DG
 SCHEMATIC: 24281-23A

MOTORGUARD

CAPACITORS

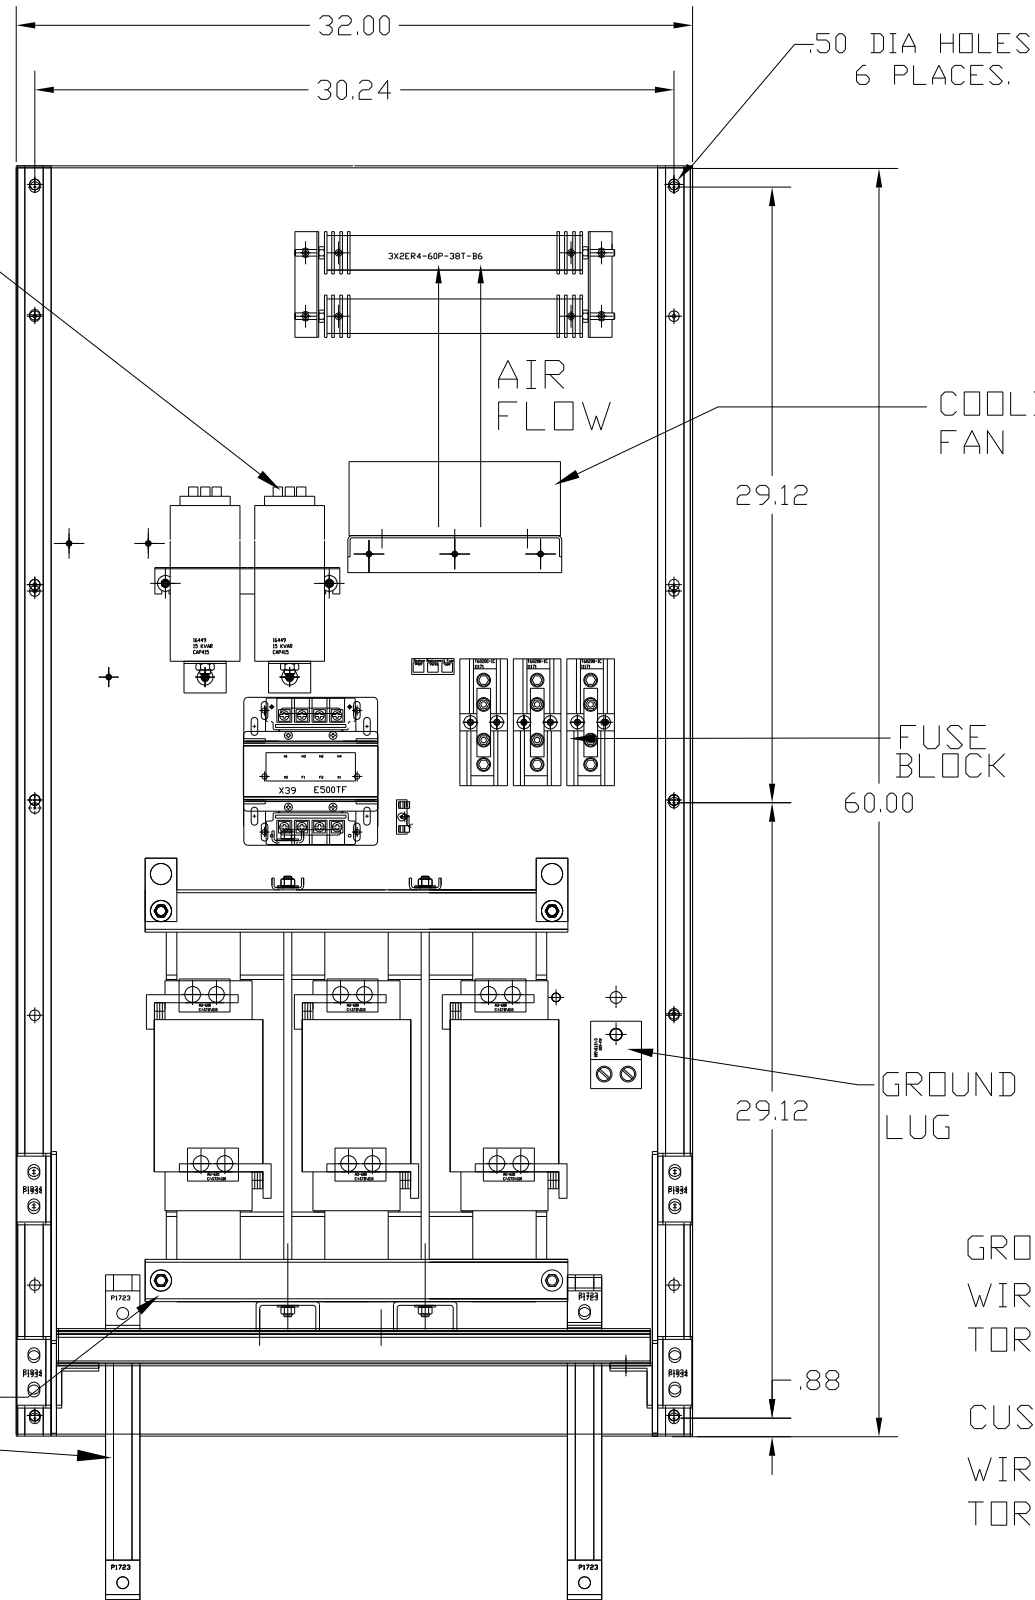


RESISTOR ASSEMBLY

TRANSFORMER

CUST. INPUT


CUST. OUTPUT

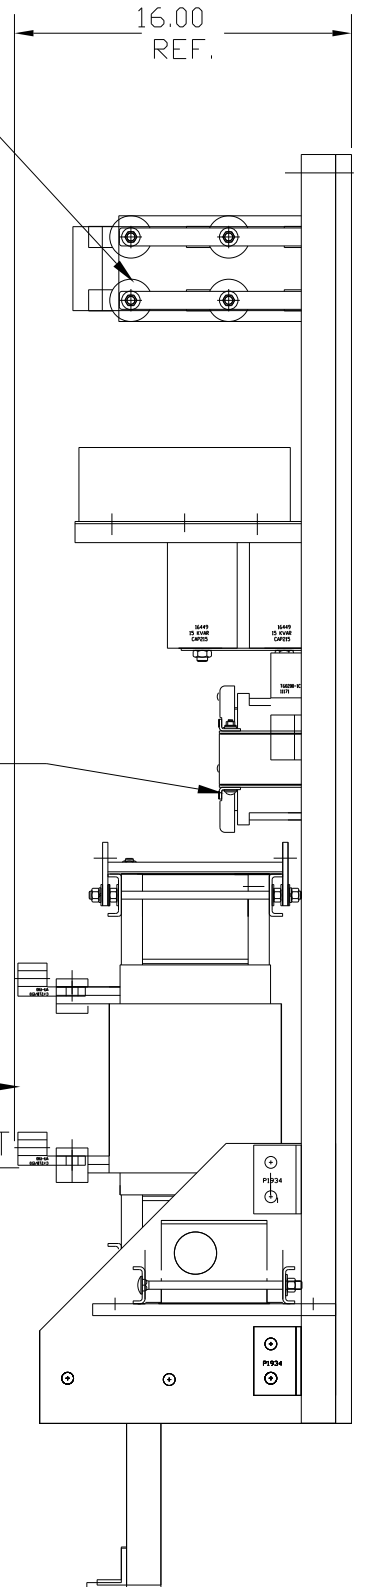

FOR SCHEMATIC SEE DRAWING P/N 24281-23A

CUSTOMER IS RESPONSIBLE FOR PROPER COOLING OF COMPONENTS IN CUSTOMERS ASSEMBLY

CUSTOMER IS RESPONSIBLE FOR PROPER INSTALLATION OF ASSEMBLY IN ACCORDANCE WITH LOCAL AND NATIONAL CODES.

				TOLERANCES (EXCEPT AS NOTED)	 7878 N. 86th STREET MILWAUKEE, WI 53224 Standard, SineWave Filter Open, 600HP, 600AMP, 600V
				DECIMAL	
				.XX ± .02 .XXX ± .01	
				FRACTIONAL ± 1/32	
				ANGULAR ± 1/2°	DRN. BY DSW SCALE TO FIT
NO	REVISION	DATE	BY		DATE 10/12/2010 APRVD.
					DWG. NO. B 104433DG SHT.1 OF1