


Parts List			
TCI Part #	Description	Quantity	Item #
11632	Lug 600 kcmil	6	1
3556	Hex Hd Bolt 3/8-16 X 1 1/4 In	9	2
11626	Nut 3/8-16	9	3
1509	Flat Washer 3/8"	18	4
22556	Bus Bar	3	5
14928	Lug Two 2/0	1	6
2934	Hex Hd Bolt 1/4-20 X 3/4 In	1	7
1505	Nut 1/4-20	1	8
1763	Flat Washer 1/4"	1	9

Lug Kit Part #LK03

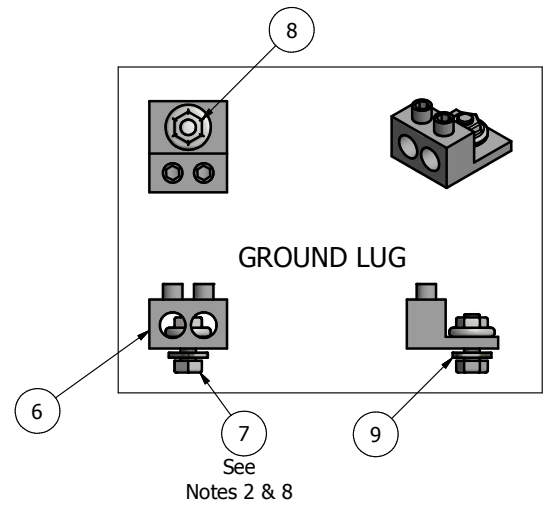

- Notes:
- 1.) Torque lug bolts (Item #2) to 200 in-lb (22.6 N-m).
  - 2.) Torque bolt (Item #7) to 66 in-lb (7.5 N-m).
  - 3.) To prevent lug from rotating place lug on backside of tab as shown.
  - 4.) All terminals are rated for aluminum or copper wire.
  - 5.) Power terminal rating, 600 kcmil to 4 Awg.
  - 6.) Power terminal tightening torque 500 in-lb (56 N-m).
  - 7.) Ground terminal rating two 2/0 to 14 Awg. Tightening torque Cu 50 in-lbs (5.6 N-m).
  - 8.) Use hole provided in enclosure bottom for mounting.
- CAUTION: To ensure proper bonding lug should be metal to metal contact with enclosure.

Follow NEC guidelines to determine acceptable wire ampacity requirements.

NO	REVISION	DATE	BY	TOLERANCES (EXCEPT AS NOTED)	W132 N10611 Grant Drive Germantown, WI 53022  Lug Kit, 600MCM-4, And Copper Bus Connector, With Ground, 2-2/0-14
				DECIMAL	
				.XX ± .03 .XXX ± .010	
				FRACTIONAL ± 1/32	
				ANGULAR ± 1°	DRN BY: DSW SCALE:
					DATE: 7/18/16 APRVD:
					LK03-Dwg SIZE: B SHT 1 OF 1