


Parts List			
TCI Part #	Description	Quantity	Item #
14927	Lug 250MCM	6	1LK
4631	Hex Hd Bolt 5/16-18 X 1 In	6	2LK
11619	Nut 5/16-18	7	3LK
1714	Flat Washer 5/16"	12	4LK

Table S250		IHI Connectors	
Wire Size Copper (solid to semi-rigid stranded and metric mm <sup>2</sup> , # #)	Rating C	Wire Size Flex Copper (#)	Torque (All Drive Means)
250kcmil-2	90	3/0-2AWG, 70-50 mm <sup>2</sup>	375 in-lb (42.4 N-m)
(1), (2), 25-16 mm <sup>2</sup> (1), 35 mm <sup>2</sup>	90	2-6 AWG, 35-16 mm <sup>2</sup>	275 in-lb (31.1 N-m)

(#) FLEX - covers stranding classes within G, H, I/DLO, Metric class5 and K/MTW.(##) mm2 sizes within AWG/kcmil ranges are included.

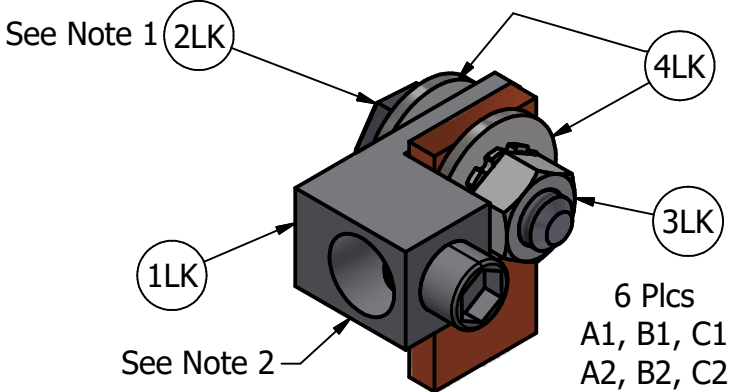

- Notes:
- 1.) Torque bolt (Items #2LK) to 135 in-lb (15 N-m).
  - 2.) To prevent lug from rotating place lug on underside of tab as shown

Follow NEC guidelines to determine acceptable wire ampacity requirements.

THE INFORMATION AND DESIGNS CONTAINED IN THIS DRAWING ARE CONFIDENTIAL AND THE PROPRIETARY PROPERTY OF ALLIED MOTION TECHNOLOGIES INC. AND ITS SUBSIDIARIES. NEITHER THIS DESIGN NOR ANY INFORMATION CONTAINED IN THIS DRAWING MAY BE REPRODUCED OR DISCLOSED TO OTHERS WITHOUT THE EXPRESS WRITTEN CONSENT OF ALLIED MOTION TECHNOLOGIES INC. AND ITS SUBSIDIARIES.

TOLERANCES (EXCEPT AS NOTED)			
DECIMAL			
.XX ± .03			
.XXX ± .010			
FRACTIONAL			
± 1/32			
ANGULAR			
± 1°			
A	6748, Update Inductor Type	8/5/2024	DSW
NO	REVISION	DATE	BY



W132N10611 Grant Drive  
Germantown, WI 53022  
© 2024 TCI, LLC

Lug Kit, 250MCM-6

DRN. BY JRN	DATE: 8/30/17	LK11-DWG
SCALE: 1/3	APRVD:	SIZE B

SHT.1 OF 1