


UNIT SPECIFICATIONS:					
KVAR	HARMONIC	VOLT	HZ	PHASE	HP
20	5TH	480	60	3	60
ENCLOSURE		NEMA 1			
APPROX.WT. LBS.		190			

SYMBOL	TCI PART NUMBER
LR	KDRG2T
TR	KTR20A65HG
CAP. 20kVAR	27609
Fu1, 2, 3	12515

ALTERNATE	TCI PART NUMBER
CAP (20 KVAR)	KCAP20A6B

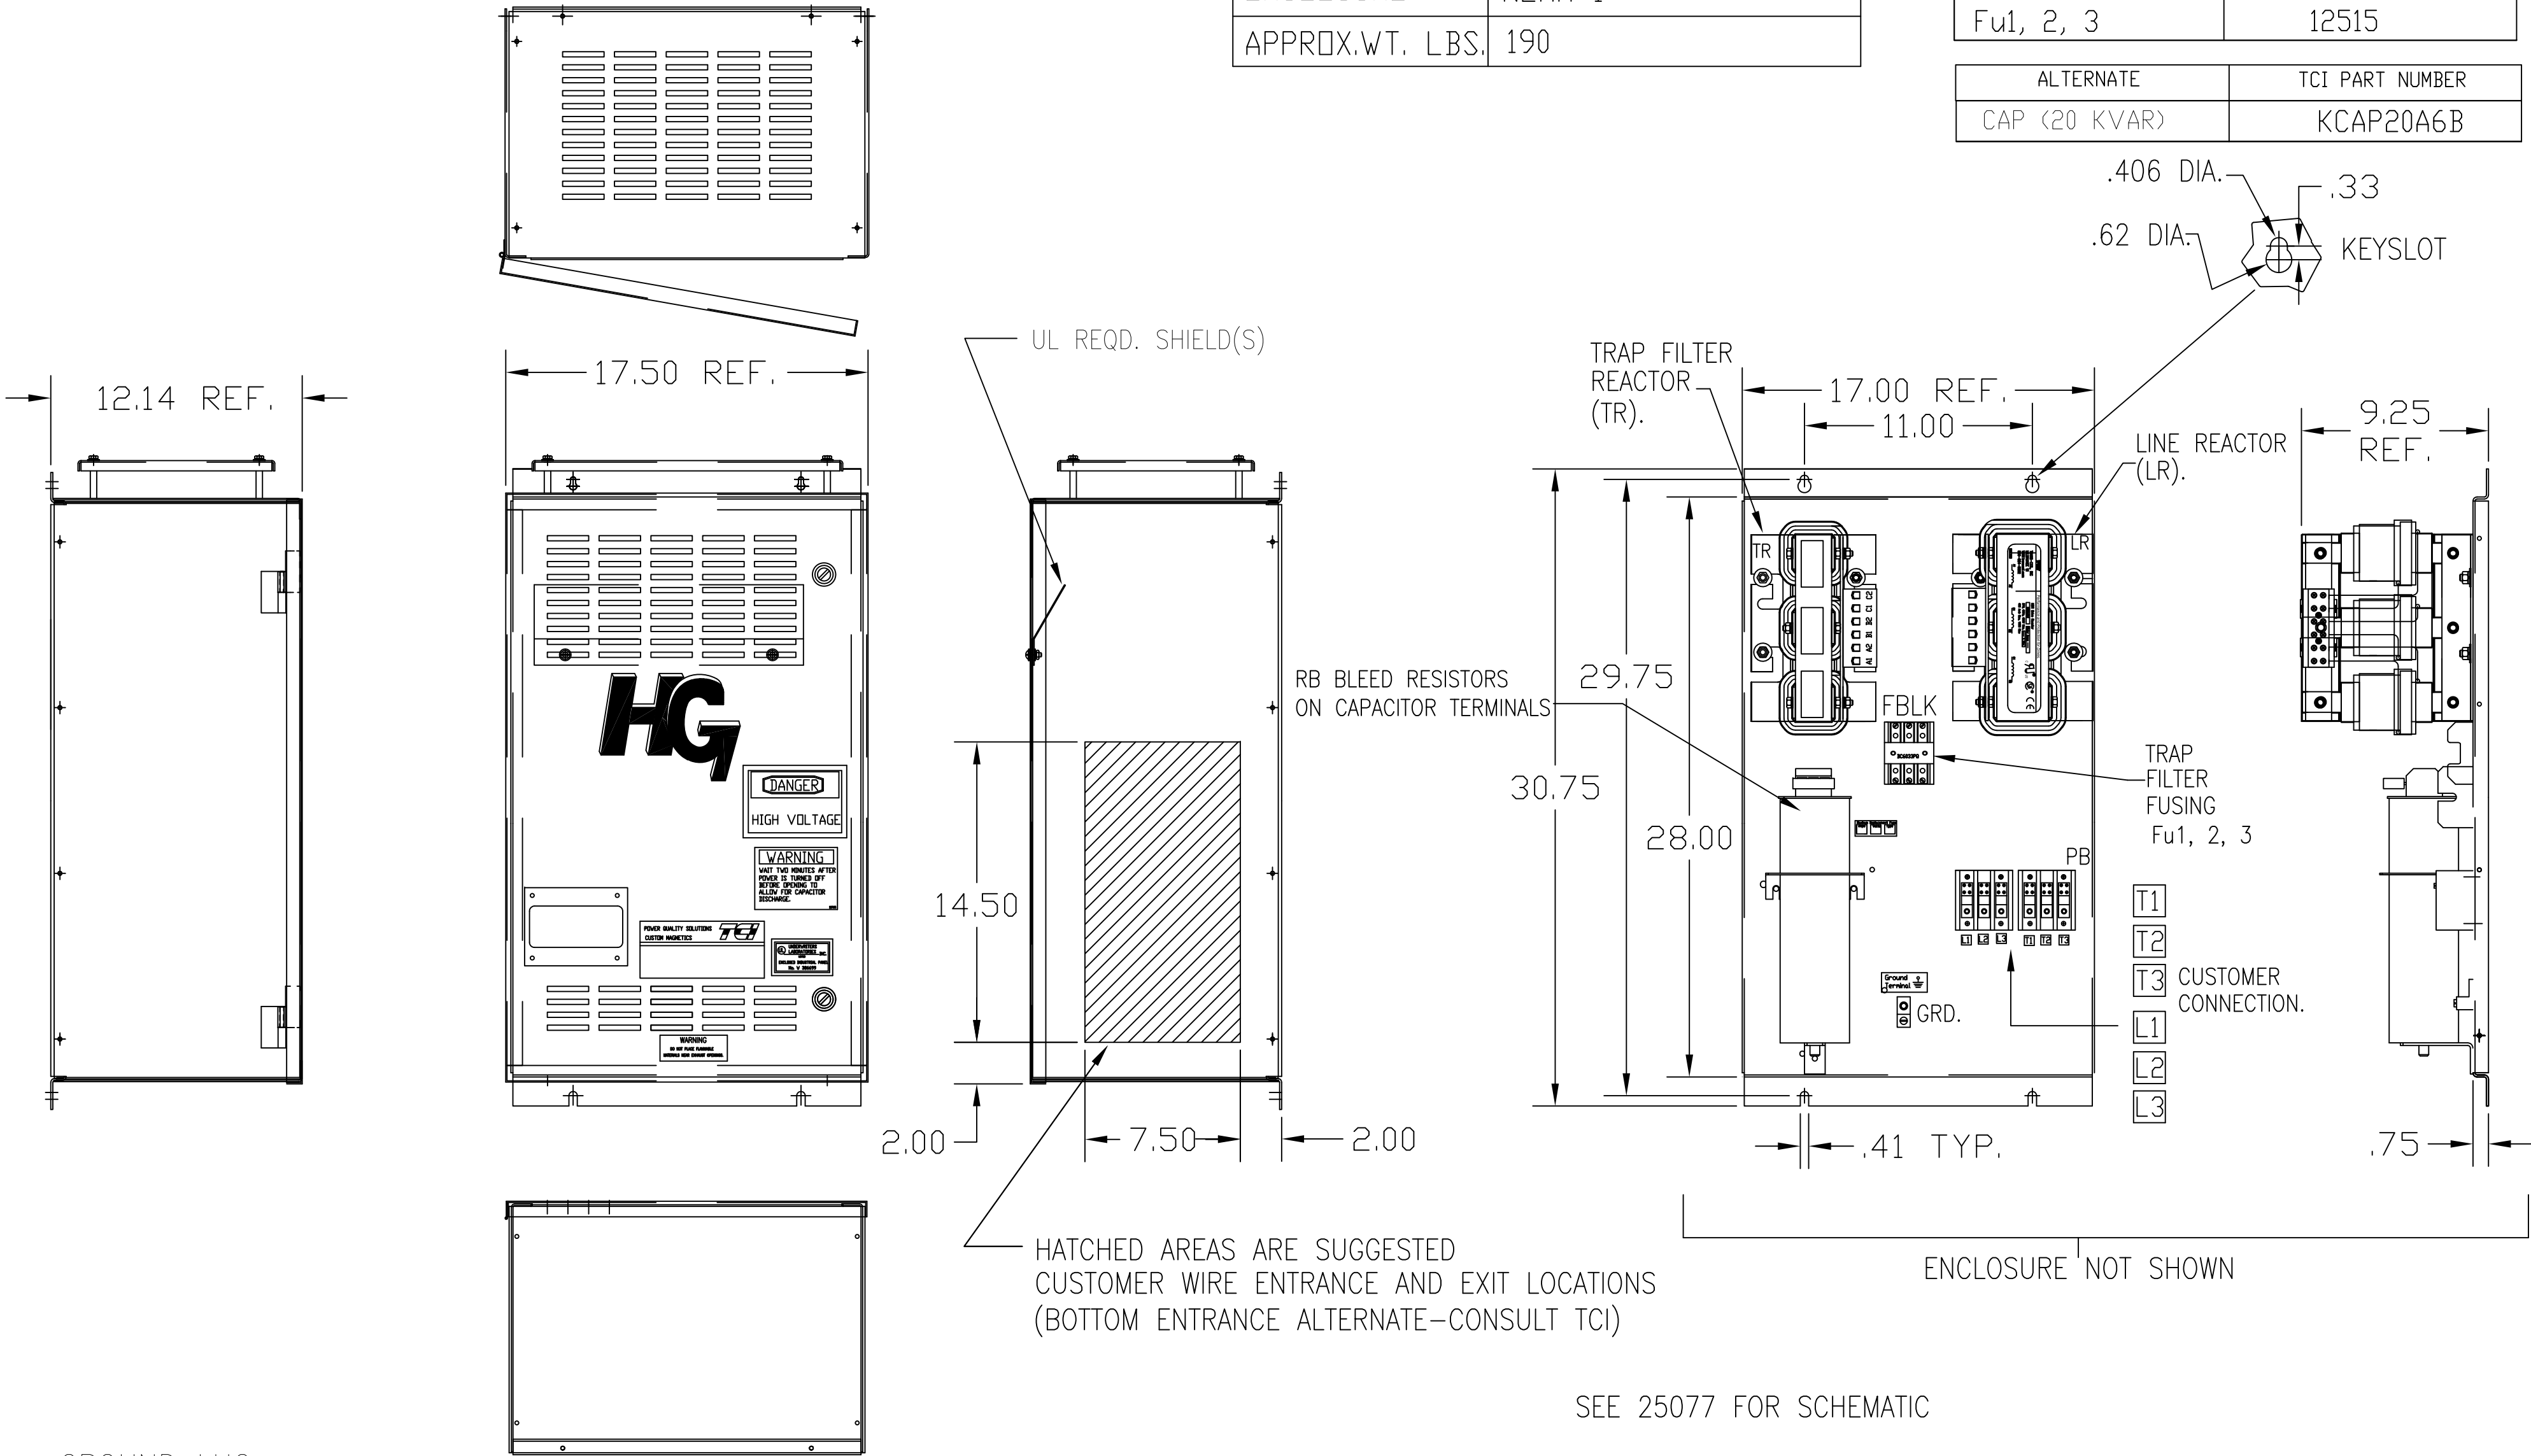

GROUND LUG:
WIRE RANGE-1/0 TO #14 AWG.

1/0 AWG thru 2 AWG 50 IN-LBS. MAX.
4 AWG thru 6 AWG 45 IN-LBS. MAX.
8 AWG 40 IN-LBS MAX.
10 AWG thru 14 WG 35 IN-LBS. MAX.

PB-POWER INPUT BLOCK:
2/0 AWG thru 6 AWG 120 IN-LBS. MAX.
8 AWG 40 IN-LBS. MAX.
10 AWG thru 14 AWG 35 IN-LBS MAX.

SEE 25077 FOR SCHEMATIC
CUSTOMER IS RESPONSIBLE FOR INSTALLATION
TO MEET ALL NATIONAL AND LOCAL ELECTRICAL CODES.

TCI, LLC CLAIMS PROPRIETARY RIGHTS IN THE MATERIAL HEREIN DISCLOSED. IT IS SUPPLIED WITHOUT PREJUDICE TO ANY PATENT RIGHTS OF TCI AND MAY NOT BE REPRODUCED OR USED TO MANUFACTURE ANYTHING SHOWN THEREIN WITHOUT WRITTEN PERMISSION FROM TCI.				TOLERANCES (EXCEPT AS NOTED)	 W132 N10611 Grant Drive Germantown, WI 53022 HG60AW01ST, HG7 STANDARD 60HP, 480/3/60, TYPE 1 DRN. BY DSW DATE 3/08/05 DWG. NO. 102560DG SCALE TO FIT SIZE C SHT.1 OF 1
	D	2900 CHG TO ASC CAPS	2/25/13	DSW	
	C	2702 REVISED FUSEBLK			
		SHIELD	9/2/10	RJC	
	B	2516, CAP WAS 23123	9/30/07	RJC	
	A	2494 PB CHANGE	5/10/07	DSW	
	NO	REVISION	DATE	BY	