


VOLTAGE 690V	NEC MOTOR HP	CATALOG NO	NEC MOTOR CURRENT	AMPS MAX	WATTS LOSS	APPROX WT-LBS
OUTPUT	3	KDRA35PDRV	3.9	4	NOTE:1	4

4.75 REF.

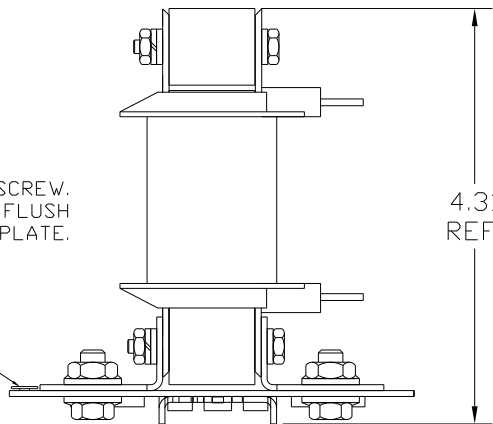


6-32 SET SCREW.
SCREW MUST BE FLUSH
WITH BOTTOM PLATE.


4.31 REF.

NOTE 1: WATTS LOSS WILL VARY DUE TO FUNDAMENTAL FREQUENCY, CARRIER FREQUENCY AND OTHER SYSTEM CHARACTERISTICS.
 KDR DRIVE REACTORS COMPLY WITH THE THERMAL AND ALTITUDE STANDARDS SET FORTH BY NEMA ST20-1992..


NOTE: CUSTOMER CAN CHANGE MOUNTED REACTOR, FROM VERTICAL TO HORIZONTAL ON DIN BRACKET.

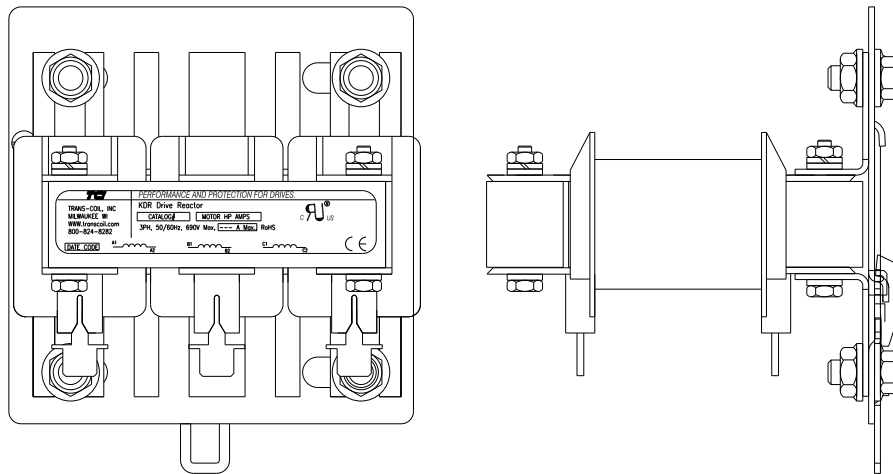

TCI'S DIN RAIL MOUNTED REACTORS FIT STANDARD 35mm DIN RAIL. TCI'S MINIMUM RECOMMENDATION IS TO USE: HIGH PROFILE STANDARD 35mm STEEL RAIL OR HEAVY DUTY STANDARD 35mm STEEL RAIL.



STANDARD STEEL HIGH PROFILE DIN RAIL.



HEAVY DUTY STEEL DIN RAIL.

TCI RECOMMENDS TAKING PRECAUTIONS WHEN SHIPPING MOUNTED REACTORS.

				TOLERANCES (EXCEPT AS NOTED)		7878 N. 86th STREET MILWAUKEE, WI 53224	
				DECIMAL	.XX ± .03		
					.XXX ± .01	KDR 690V DIN RAIL FRAME A	
				FRACTIONAL	± 1/32		
				ANGULAR	± 1/2°	DRN BY DSW	DATE 11/29/2011
NO	REVISION	DATE	BY	SCALE NONE	APPRV	DWG NO. C	KDRA35PDRV DG
							SHT. 1 OF 1