



CATALOG NO	VOLTAGE	NEC MOTOR HP	NEC MOTOR CURRENT	WATTS LOSS	APPROX. WEIGHT-LBS	TORQUE (LB-IN)
KDRULL49HE01	575/600	400	382	603	177	275

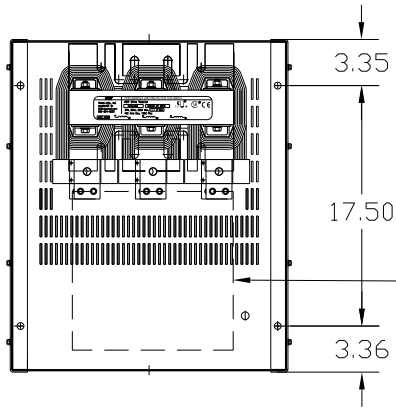

LABEL PLACED ON INSIDE WALL OF CABINET.


RECOMMENDED CONDUIT ENTRANCE AREA - LEFT FRONT SIDE, BOTTOM FRONT, RIGHT FRONT SIDE AND TOP.

NOTE 1: WATTS LOSS WILL VARY DUE TO FUNDAMENTAL FREQUENCY, CARRIER FREQUENCY AND OTHER SYSTEM CHARACTERISTICS.



KDR DRIVE REACTORS COMPLY WITH THE THERMAL AND ALTITUDE STANDARDS SET FORTH BY NEMA ST20-1992..

NEC MOTOR CURRENTS SHOWN IN THE 208/240 VOLT CHART ARE BASED ON HORSEPOWER AT 208 VOLT. 575/600 VOLT CHART USE THE 575 VOLT CURRENT RATING.

LUG WIRE RANGE TWO 350MCM-4, AL. OR CU. FOR REACTOR.  
 TIGHTENING TORQUE. 275 LB-IN

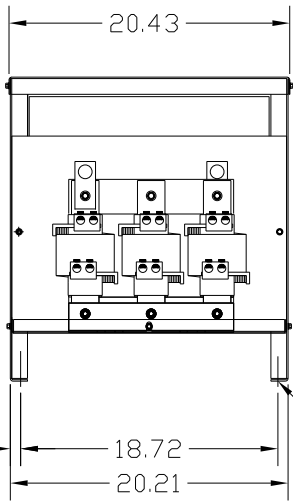


.50 DIA MOUNTING HOLE (4 PLACES)

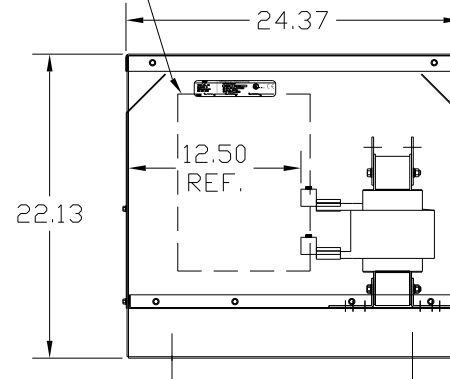

VENDOR LILLY POWDER COATINGS, INC.  
 PRODUCT CODE 312E  
 COLOR PEBBLE GRAY  
 POWDER TYPE POLYESTER POLYURETHANE

PAINT SUITABLE FOR OUTDOOR APPLICATION PER UL TYPE 3R AND APPLIED PER A UL ACCEPTED DTV2 COATING PROGRAM.

CUSTOMER IS RESPONSIBLE FOR INSTALLATION TO MEET ALL LOCAL AND NATIONAL CODES

TOLERANCES (EXCEPT AS NOTED)				 7878 N. 86th STREET MILWAUKEE, WI 53224
DECIMAL				
			.XX ± .03	<b>KDR DRIVE REACTOR</b> 575V, ENCLOSED, TYPE 1
			.XXX ± .01	
			FRACTIONAL ± 1/32	
			ANGULAR ± 1/2°	DRN. BY DSW DATE 12/09/03 DWG. NO. BKDRULL49HE01DG SCALE APPRVD. SHT. 1 OF 1
NO	REVISION	DATE	BY	